
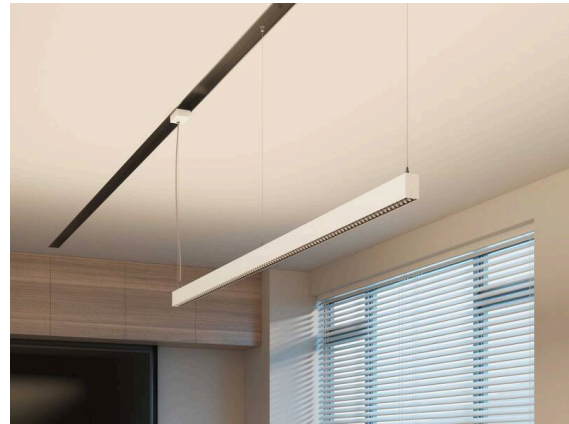



**PERFORA PRO**

**222-00245**

PERFORA PROLINE M PDI SUSPENSION made of aluminium, white, similar to RAL 9016, lens optic with anti-glare grid light output direct / indirect 40:60, UGR <16, with converter, max. 1200mA, dimmability: DALI 2, Push, cable transparent, adapter/ceiling base white, pendant length 4000mm, IP20

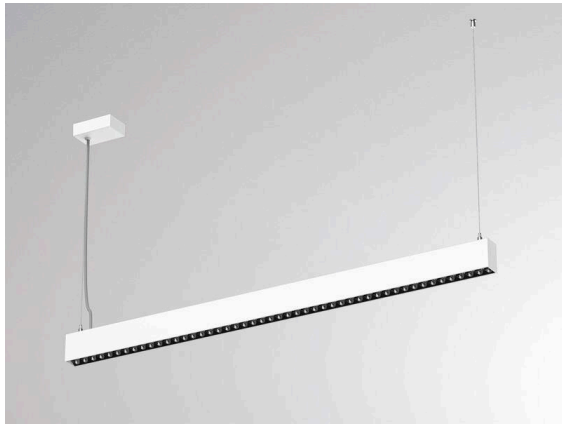


**SKETCH**

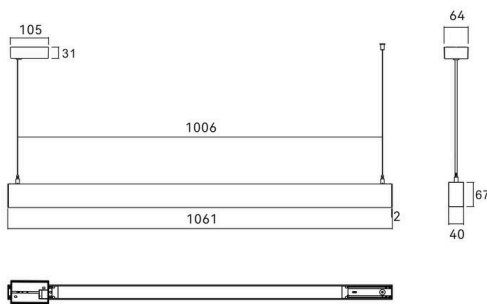

**TECHNICAL DETAILS**

Light source	LED
System performance [W]	45
Luminous flux [lm]	4780/5155
Current sec. [mA]	1200
Colour temperature	3000/4000K
CRI	>90
UGR	<16
Optics	lens optics with glare control louvre
Converter	with converter
Dimmability	DALI 2, Push
Light emission area	direct / indirect 40:60
Voltage	220-240V 50/60Hz
Length [mm]	1056
Width [mm]	40
Height [mm]	65
Length pendant [mm]	4000
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	white
RAL	9016
Colour of adapter / ceiling base	white
Cable	transparent
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	45
Net weight [kg]	2.60
EAN number	9010870338128

**LIGHT DISTRIBUTION CURVE**

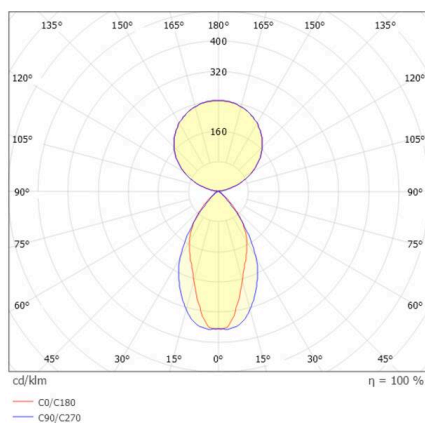

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.