


MAGIS

222-00034

MAGIS DOUBLE SD WALL / CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, high-efficiently vacuum deposited synthetic reflector beam 36°, light output direct, UGR <22, swiveling 350°, tilting 90°, with converter, max. 1000mA, dimmability: DALI 2, IP20




SKETCH

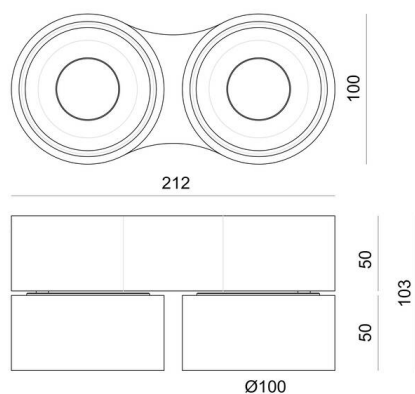

TECHNICAL DETAILS

Light source	LED
System performance [W]	31
Luminous flux [lm]	2110
Current sec. [mA]	1000
Colour temperature	3000K
CRI	>90
UGR	<22
Optics	vacuum deposited synthetic reflector
Converter	with converter
Dimmability	DALI 2
Light emission area	direct
Beam angle	36°
Voltage	220-240V 50/60Hz
Length [mm]	212
Width [mm]	100
Height [mm]	103
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	white
RAL	9016
Lifetime [h]	L80 B10 50 000
Energy efficiency class	F
Number of luminaires B16A	37
Net weight [kg]	1.57
EAN number	9010870140431

LIGHT DISTRIBUTION CURVE

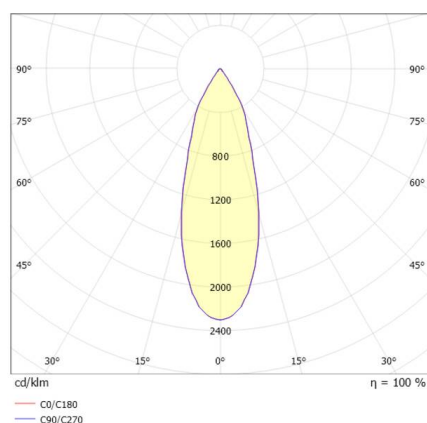

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.