


MAG

222-00145


MAG SDI SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, high quality glass lens beam 57°, light output direct / indirect, UGR <16, with converter, max. 500mA, dimmability: TRIAC, IP20



SKETCH

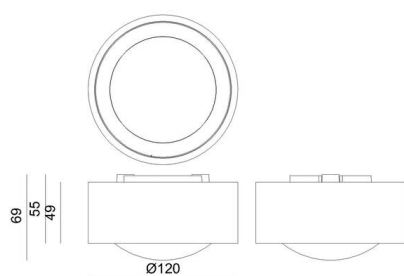

LIGHT DISTRIBUTION CURVE

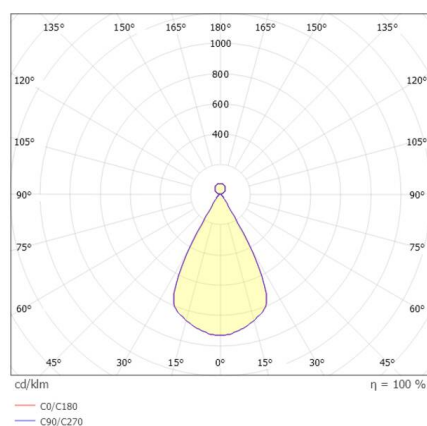

TECHNICAL DETAILS

Light source	LED
System performance [W]	16,5
Luminous flux [lm]	1180
Current sec. [mA]	500
Colour temperature	3000K
CRI	>90
UGR	<16
Optics	high quality glass lens
Converter	with converter
Dimmability	TRIAC
Light emission area	direct / indirect
Beam angle	57°
Voltage	220-240V 50/60Hz
Height [mm]	69
Diameter [mm]	120
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	black
RAL	9005
Lifetime [h]	L80 B10 50 000
Energy efficiency class	F
Number of luminaires B16A	56
Net weight [kg]	0.66
EAN number	9010870561076



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.