



LINE

333-00015

LINE 25 DOUBLE W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, beam 100°, light output direct / indirect, max. 700mA, dimmability: on/off, IP65

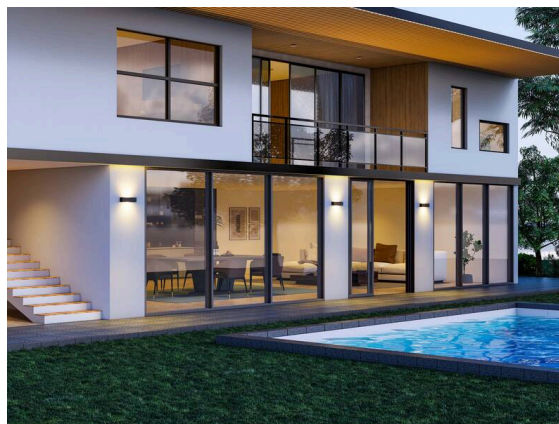

SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	14,5
Luminous flux [lm]	2400/2060
Current sec. [mA]	700
Colour temperature	2700/3000K
CRI	>80
Dimmability	on/off
Light emission area	direct / indirect
Beam angle	100°
Voltage	220-240V 50/60Hz

Length [mm]	250
Width [mm]	60
Height [mm]	60
IP protection class	IP65
IP protection class	protection cl. I


Material	aluminium
Colour of body	anthrazite
RAL	7016
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	50

Net weight [kg]	1.18
EAN number	9010870420908



Energy label

LIGHT DISTRIBUTION CURVE

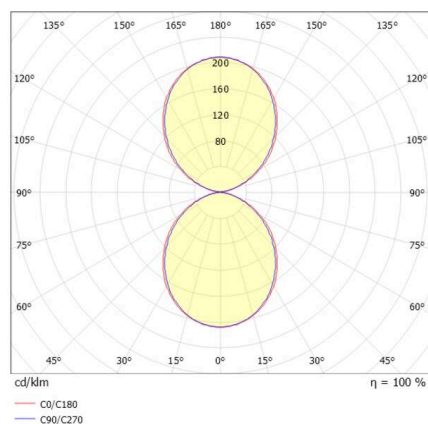

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.