

LINE

333-00017

LINE 50 DOUBLE W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, beam 100°, light output direct / indirect, max. 700mA, dimmability: on/off, IP65




SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	19,5
Luminous flux [lm]	3520/2960
Current sec. [mA]	700
Colour temperature	2700/3000K
CRI	>80
Dimmability	on/off
Light emission area	direct / indirect
Beam angle	100°
Voltage	220-240V 50/60Hz
Length [mm]	500
Width [mm]	60
Height [mm]	60
IP protection class	IP65
IP protection class	protection cl. I
Material	aluminium
Colour of body	anthrazite
RAL	7016
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	22
Net weight [kg]	2.17
EAN number	9010870420946

LIGHT DISTRIBUTION CURVE

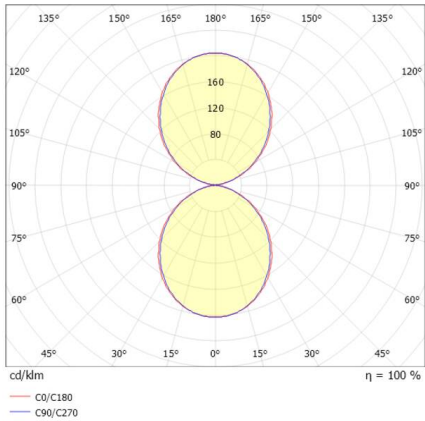

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.