



LINE

333-00018

LINE 50W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, beam 100°, light output direct, max. 350mA, dimmability: on/off, IP65

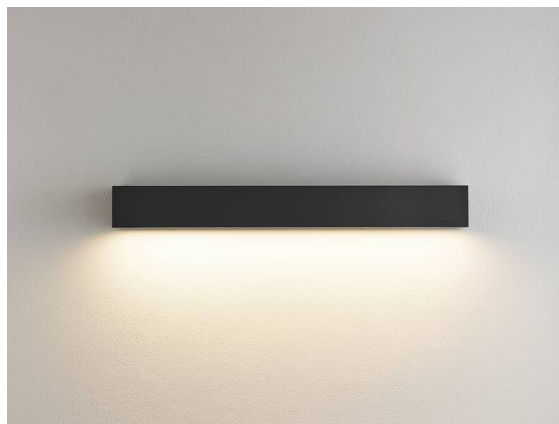

SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	15
Luminous flux [lm]	1760/1480
Current sec. [mA]	350
Colour temperature	2700/3000K
CRI	>80
Dimmability	on/off
Light emission area	direct
Beam angle [°]	100°
Voltage	220-240V 50/60Hz

Length [mm]	500
Width [mm]	60
Height [mm]	60
IP protection class	IP65
IP protection class	protection cl. I


Material	aluminium
Colour of body	anthrazite
RAL	7016
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	50

Net weight [kg]	2.02
EAN number	9010870420953



Energy label

LIGHT DISTRIBUTION CURVE

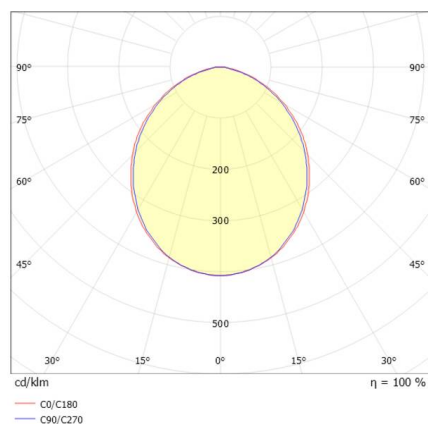

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.