


## MAGIS

222-00044


MAGIS MINI DOUBLE SD WALL / CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, high-efficiently vacuum deposited synthetic reflector beam 46°, light output direct, UGR <19, swiveling 350°, tilting 90°, with converter, max. 500mA, dimmability: DALI 2, IP20



## SKETCH

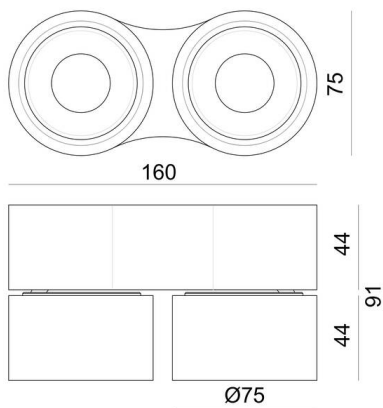

## LIGHT DISTRIBUTION CURVE

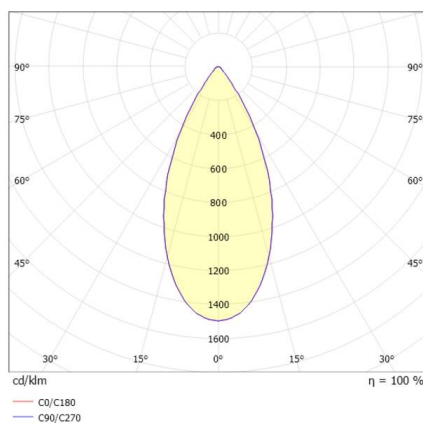

## TECHNICAL DETAILS

|                           |                                      |
|---------------------------|--------------------------------------|
| Light source              | LED                                  |
| System performance [W]    | 20                                   |
| Luminous flux [lm]        | 1500                                 |
| Current sec. [mA]         | 500                                  |
| Colour temperature        | 2700K                                |
| CRI                       | >90                                  |
| UGR                       | <19                                  |
| Optics                    | vacuum deposited synthetic reflector |
| Converter                 | with converter                       |
| Dimmability               | DALI 2                               |
| Light emission area       | direct                               |
| Beam angle                | 46°                                  |
| Voltage                   | 220-240V 50/60Hz                     |
| Length [mm]               | 160                                  |
| Width [mm]                | 75                                   |
| Height [mm]               | 92                                   |
| IP protection class       | IP20                                 |
| IP protection class       | protection cl. I                     |
| IK value                  | IK02                                 |
| Material                  | aluminium                            |
| Colour of body            | white                                |
| RAL                       | 9003                                 |
| Lifetime [h]              | L80 B10 50 000                       |
| Energy efficiency class   | E                                    |
| Number of luminaires B16A | 112                                  |
| Net weight [kg]           | 0.86                                 |
| EAN number                | 9010870171107                        |



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.