



MAGIS

222-00046


MAGIS MINI DOUBLE SD WALL / CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, high-efficiently vacuum deposited synthetic reflector beam 46°, light output direct, UGR <19, swiveling 350°, tilting 90°, with converter, max. 500mA, dimmability: DALI 2, IP20

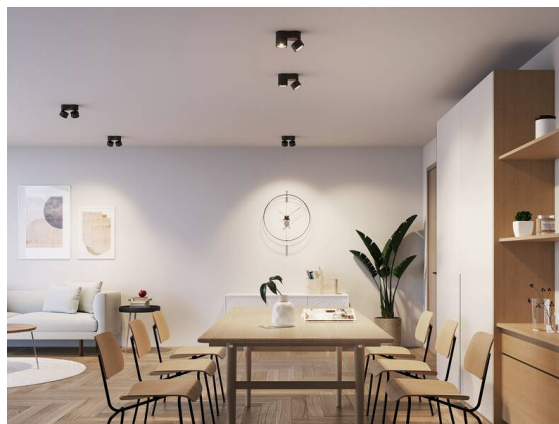

SKETCH

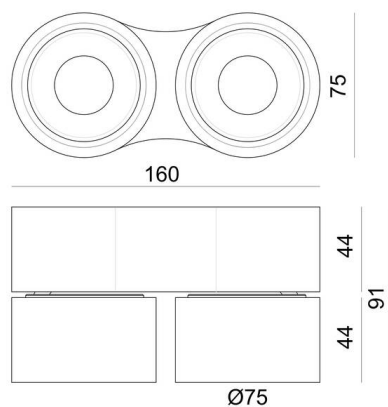

LIGHT DISTRIBUTION CURVE

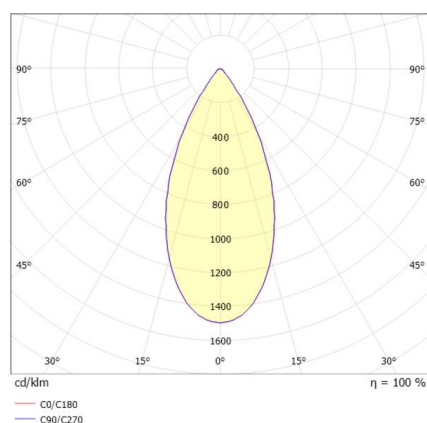

TECHNICAL DETAILS

Light source	LED
System performance [W]	20
Luminous flux [lm]	1500
Current sec. [mA]	500
Colour temperature	2700K
CRI	>90
UGR	<19
Optics	vacuum deposited synthetic reflector
Converter	with converter
Dimmability	DALI 2
Light emission area	direct
Beam angle	46°
Voltage	220-240V 50/60Hz
Length [mm]	160
Width [mm]	75
Height [mm]	92
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	black
RAL	9005
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	112
Net weight [kg]	0.86
EAN number	9010870171145



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.