



260

637-00402024905b

2 GO+ TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9016,high-efficiently vacuum deposited aluminium reflector beam 24°, light output direct, swiveling 350°, tilting 180°, with converter, max. 700mA, dimmability: Smart bluetooth, IP20

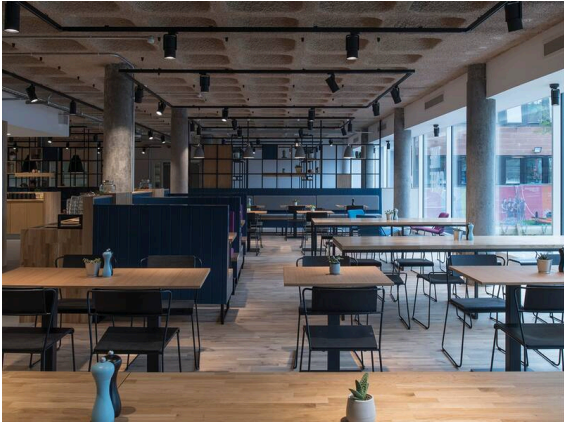


SKETCH

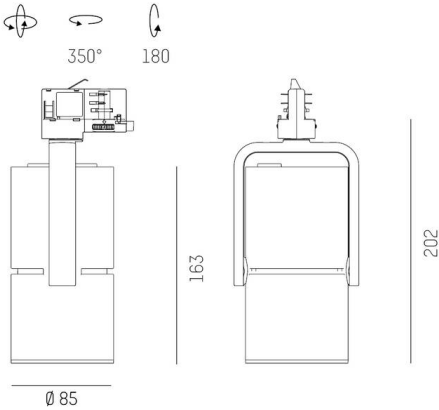

TECHNICAL DETAILS

Light source	LED
System performance [W]	27
Luminous flux [lm]	2430
Current sec. [mA]	700
Colour temperature	3000K
CRI	PREMIUM>90
Optics	vacuum deposited aluminium reflector
Converter	with converter
Dimmability	Smart bluetooth
Light emission area	direct
Beam angle [°]	24°
Voltage	220-240V 50/60Hz
Length [mm]	163
Height [mm]	202
Diameter [mm]	85
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK04
Material	aluminium
Colour of body	white
RAL	9016
Lifetime [h]	L80 B10 50 000
Number of luminaires B16A	50
Net weight [kg]	0.88
EAN number	9008905843150

LIGHT DISTRIBUTION CURVE

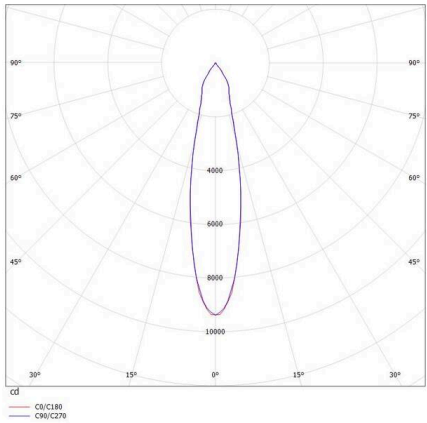

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.