


LON

224-0121221290506000

LON ROUND 1000 PDI SUSPENSION made of aluminium, white, similar to RAL 9016, opal silicone diffuser beam 114°, light output direct / indirect, with converter, dimmability: not dimmable, cable black, soft-touch, adapter/ceiling base black, pendant length 3000mm, IP20




SKETCH

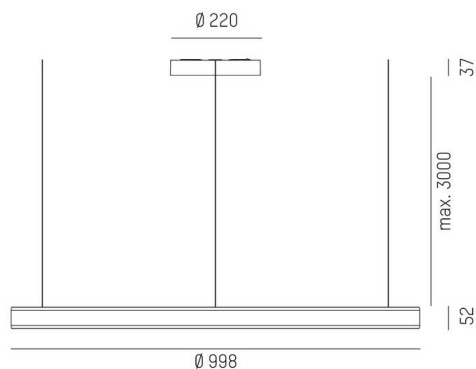

TECHNICAL DETAILS

| | |
|----------------------------------|------------------------|
| Light source | LED |
| System performance [W] | 68 |
| Luminous flux [lm] | 3960 |
| Colour temperature | 3000K |
| CRI | >90 |
| Optics | opal silicone diffuser |
| Converter | with converter |
| Dimmability | not dimmable |
| Light emission area | direct / indirect |
| Beam angle | 114° |
| Voltage | 220-240V 50/60Hz |
| Length [mm] | 998 |
| Length pendant [mm] | 3000 |
| Diameter [mm] | 1000 |
| IP protection class | IP20 |
| IP protection class | protection cl. I |
| Material | aluminium |
| Colour of body | white |
| RAL | 9016 |
| Colour of adapter / ceiling base | black |
| Cable | black, soft-touch |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency class | G |
| Net weight [kg] | 3.74 |
| EAN number | 9010979042001 |

LIGHT DISTRIBUTION CURVE

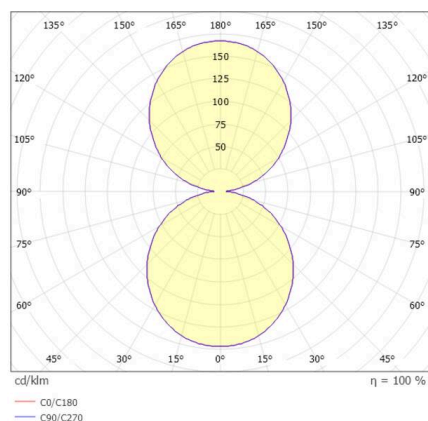

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.