



DARK NIGHT

527-0009040449050

DARK NIGHT TURN XS SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, decor gold,high-efficiently vacuum deposited aluminium reflector beam 60°, light output direct, UGR <19, swiveling 355°, tilting 25°, with converter, max. 250mA, dimmability: not dimmable, IP20

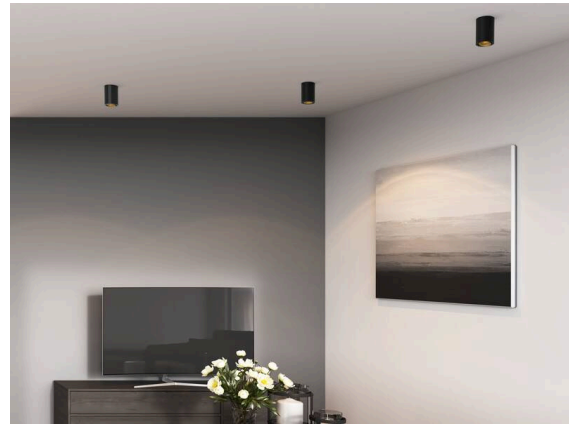


SKETCH

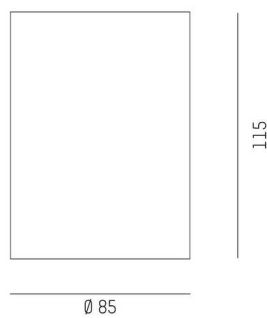

TECHNICAL DETAILS

| | |
|---------------------------|--------------------------------------|
| Light source | LED |
| System performance [W] | 9 |
| Luminous flux [lm] | 600 |
| Current sec. [mA] | 250 |
| Colour temperature | 3000K |
| CRI | PREMIUM>90 |
| UGR | <19 |
| Optics | vacuum deposited aluminium reflector |
| Converter | with converter |
| Dimmability | not dimmable |
| Light emission area | direct |
| Beam angle | 60° |
| Voltage | 220-240V 50/60Hz |
| Height [mm] | 115 |
| Diameter [mm] | 85 |
| IP protection class | IP20 |
| IP protection class | protection cl. I |
| IK value | IK02 |
| Material | aluminium |
| Colour of body | white |
| RAL | 9016 |
| Colour of decor | gold |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency class | D |
| Number of luminaires B16A | 50 |
| Net weight [kg] | 0.71 |
| EAN number | 9010506861099 |

LIGHT DISTRIBUTION CURVE

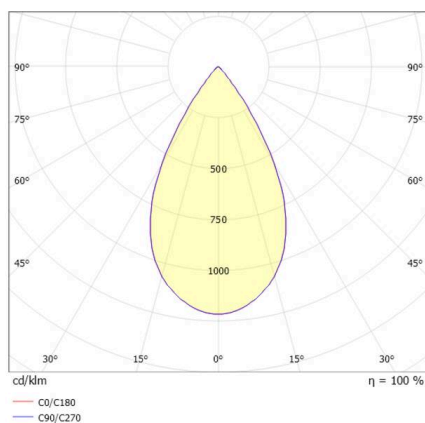

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.