

**DARK NIGHT**

**527-0009060343060**

DARK NIGHT TURN XS SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, decor white,high-efficiently vacuum deposited aluminium reflector beam 40°, light output direct, UGR <19, swiveling 355°, tilting 25°, with converter, max. 250mA, dimmability: not dimmable, IP20




**SKETCH**



**TECHNICAL DETAILS**

|                           |                                      |
|---------------------------|--------------------------------------|
| Light source              | LED                                  |
| System performance [W]    | 9                                    |
| Luminous flux [lm]        | 600                                  |
| Current sec. [mA]         | 250                                  |
| Colour temperature        | 2700K                                |
| CRI                       | PREMIUM>90                           |
| UGR                       | <19                                  |
| Optics                    | vacuum deposited aluminium reflector |
| Converter                 | with converter                       |
| Dimmability               | not dimmable                         |
| Light emission area       | direct                               |
| Beam angle                | 40°                                  |
| Voltage                   | 220-240V 50/60Hz                     |
| Height [mm]               | 115                                  |
| Diameter [mm]             | 85                                   |
| IP protection class       | IP20                                 |
| IP protection class       | protection cl. I                     |
| IK value                  | IK02                                 |
| Material                  | aluminium                            |
| Colour of body            | black                                |
| RAL                       | 9005                                 |
| Colour of decor           | white                                |
| Lifetime [h]              | L80 B10 50 000                       |
| Energy efficiency class   | D                                    |
| Number of luminaires B16A | 50                                   |
| Net weight [kg]           | 0.71                                 |
| EAN number                | 9010506761221                        |

**LIGHT DISTRIBUTION CURVE**

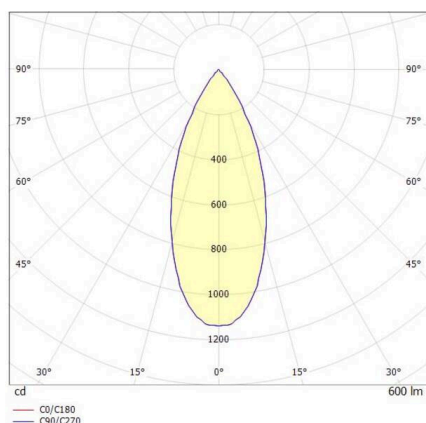

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.