


DARK NIGHT

684-00206054905v2


DARK NIGHT MEDIUM R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9016, decor white, high-efficiently vacuum deposited aluminium reflector beam 40°, light output direct, UGR <16, without converter, max. 500/700/900mA, dimmability: see converter, IP20

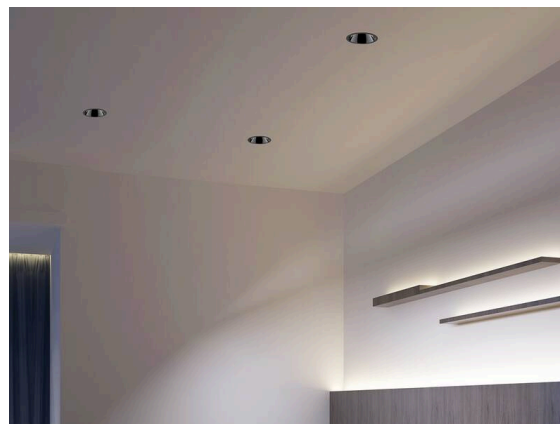

SKETCH

 1 - 25mm


 150 mm, ET 136 mm

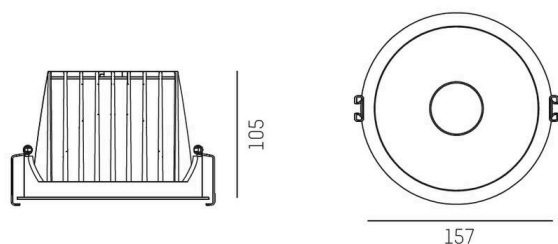

TECHNICAL DETAILS

| | |
|-------------------------|--------------------------------------|
| Light source | LED 18/25/33W |
| Luminous flux [lm] | 1970/2650/3280 |
| Current sec. [mA] | 500/700/900 |
| Colour temperature | 3000K |
| CRI | PREMIUM>90 |
| UGR | <16 |
| Optics | vacuum deposited aluminium reflector |
| Converter | without converter |
| Dimmability | see converter |
| Light emission area | direct |
| Beam angle | 40° |
| Length [mm] | 157 |
| Height [mm] | 111 |
| Diameter [mm] | 157 |
| Ceiling cutout [mm] | 150 |
| Ceiling thickness [mm] | 1-25 |
| Mounting depth [mm] | 141 |
| IP protection class | IP20 |
| IP protection class | protection cl. II |
| IK value | IK02 |
| Material | aluminium |
| Colour of body | white |
| RAL | 9016 |
| Colour of decor | white |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency class | E |
| Net weight [kg] | 0.35 |
| EAN number | 9010870110632 |

LIGHT DISTRIBUTION CURVE

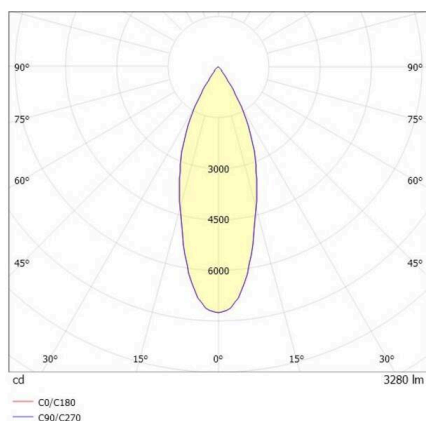

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.