

SUBLINE

222-00381


SUBLINE M TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, black, similar to RAL 9005, lens optic with anti-glare grid beam 48°, light output direct, UGR <22, with converter, max. 750mA, dimmability: DALI, IP20



TECHNICAL DETAILS


Light source	LED
System performance [W]	28,5
Luminous flux [lm]	3635
Current sec. [mA]	750
Colour temperature	3000K
CRI	>90
UGR	<22
Optics	lens optics with glare control louvre
Converter	with converter
Dimmability	DALI
Light emission area	direct
Beam angle [°]	48°
Voltage	220-240V 50Hz
Length [mm]	1025
Width [mm]	14
Height [mm]	28
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black
RAL	9005
Lifetime [h]	L80 B10 50 000
Energy efficiency class	C
Number of luminaires B16A	52
Net weight [kg]	1.00
EAN number	9010979654174

SKETCH

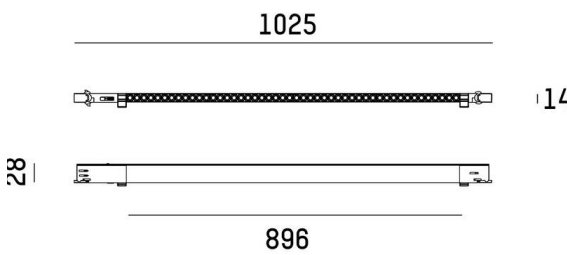

Energy label

LIGHT DISTRIBUTION CURVE

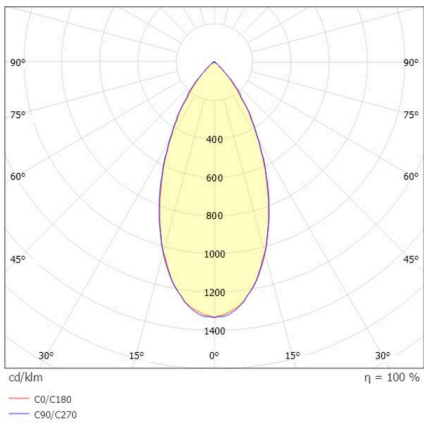

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.