


# TUNE

157-0116060119442

TUNE S PC EXTENSION HIGH-BAY REFLECTOR LUMINAIRE made of aluminium, silver, similar to RAL 9006, high quality plastic lens beam 75°,  
 accessoire: PC, light output direct, UGR <25, with converter, max. 1600mA, dimmability: DALI 2, motion swarm, IP55 incl. power supply  
 for sensor standalone versions



## SKETCH

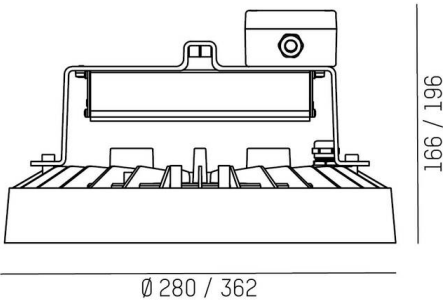


## TECHNICAL DETAILS

|                           |                           |
|---------------------------|---------------------------|
| Light source              | LED                       |
| System performance [W]    | 71                        |
| Luminous flux [lm]        | 10700                     |
| Current sec. [mA]         | 1600                      |
| Colour temperature        | 3000K                     |
| CRI                       | >80                       |
| UGR                       | <25                       |
| Optics                    | high quality plastic lens |
| Converter                 | with converter            |
| Dimmability               | DALI 2, motion swarm      |
| Light emission area       | direct                    |
| Beam angle                | 75°                       |
| Voltage                   | 220-240V 50/60Hz          |
| Length [mm]               | 280                       |
| Height [mm]               | 176                       |
| Diameter [mm]             | 280                       |
| IP protection class       | IP55                      |
| IP protection class       | protection cl. I          |
| IK value                  | IK10                      |
| Material                  | aluminium                 |
| Colour of body            | grey                      |
| RAL                       | 9006                      |
| Lifetime [h]              | L80 B10 70 000            |
| Ambient temperature       | from -30° to +50°         |
| Energy efficiency class   | D                         |
| Number of luminaires B16A | 7                         |
| IFS                       | True                      |
| Net weight [kg]           | 1.87                      |
| EAN number                | 9010870837164             |



Energy label

## LIGHT DISTRIBUTION CURVE

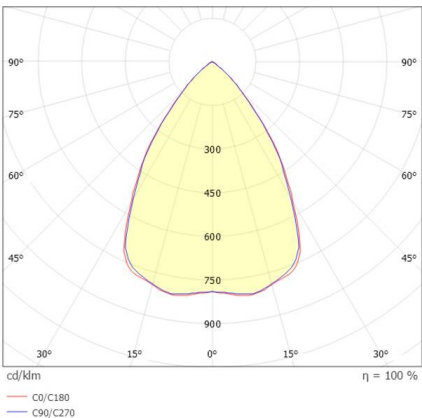

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.