


DIVO

192-209020002964r

DIVO SHORT VOLARE SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, black, similar to RAL 9005, high quality plastic lens beam 36°, light output direct, with converter, max. 260mA, dimmability: Loxone Air, cable black, adapter/ceiling base silver, pendant length 3000mm, IP20




SKETCH

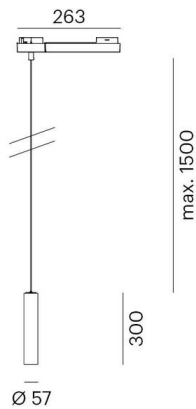

TECHNICAL DETAILS

Light source	LED
System performance [W]	12
Luminous flux [lm]	680
Current sec. [mA]	260
Colour temperature	3000K
CRI	>90
Optics	high quality plastic lens
Converter	with converter
Dimmability	Loxone Air
Light emission area	direct
Beam angle	36°
Voltage	220-240V 50/60Hz
Length [mm]	3000
Height [mm]	300
Length pendant [mm]	3000
Diameter [mm]	57
IP protection class	IP20
IP protection class	protection cl. II
Material	aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	silver
Cable	black
Lifetime [h]	L80 B10 20 000
Energy efficiency class	G
Net weight [kg]	1.17
EAN number	9010506772982

LIGHT DISTRIBUTION CURVE

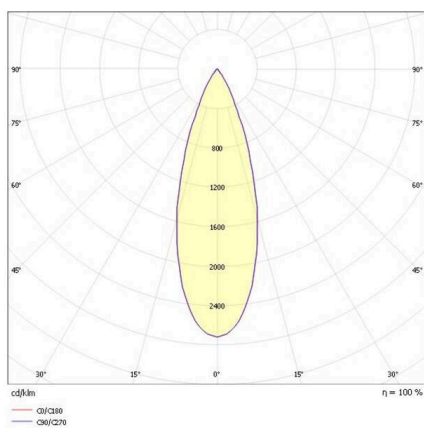

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.