


FIUME

184-209000002954r

FIUME VOLARE SUSPENSION WITH 2-PH VOLARE ADAPTER made of gypsum, white, similar to RAL 9003, satined PMMA opal diffuser with converter, max. 260mA, dimmability: Loxone Air, cable white, adapter/ceiling base grey, pendant length 2000mm, IP20




SKETCH

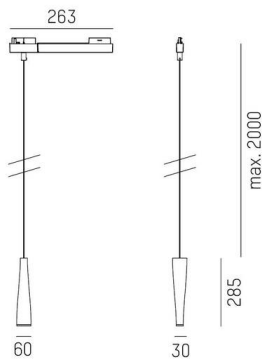

TECHNICAL DETAILS

Light source	LED
System performance [W]	8
Luminous flux [lm]	280
Current sec. [mA]	260
Colour temperature	3000K
CRI	>90
Optics	PMMA opal diffuser
Converter	with converter
Dimmability	Loxone Air
Voltage	220-240V 50/60Hz
Length [mm]	61,6
Width [mm]	30
Height [mm]	285
Length pendant [mm]	2000
IP protection class	IP20
IP protection class	protection cl. II
Material	gypsum
Colour of body	white
RAL	9003
Colour of adapter / ceiling base	grey
Cable	white
Lifetime [h]	L80 B10 20 000
Energy efficiency class	F
Net weight [kg]	0.98
EAN number	9010506773842

LIGHT DISTRIBUTION CURVE

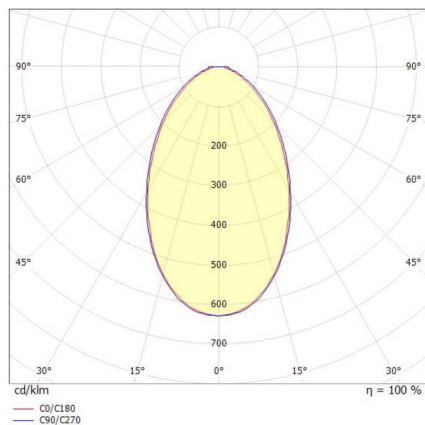

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.