


## FIUME

184-2090000029540

FIUME VOLARE SUSPENSION WITH 2-PH VOLARE ADAPTER made of gypsum, white, similar to RAL 9003, satined PMMA opal diffuser with converter, max. 260mA, dimmability: not dimmable, cable white, adapter/ceiling base grey, pendant length 2000mm, IP20




## SKETCH

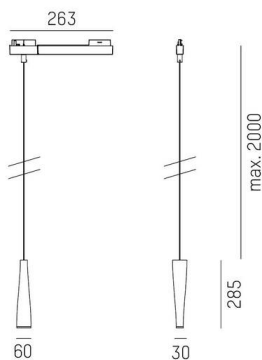

## TECHNICAL DETAILS

|                                  |                    |
|----------------------------------|--------------------|
| Light source                     | LED                |
| System performance [W]           | 8                  |
| Luminous flux [lm]               | 280                |
| Current sec. [mA]                | 260                |
| Colour temperature               | 3000K              |
| CRI                              | >90                |
| Optics                           | PMMA opal diffuser |
| Converter                        | with converter     |
| Dimmability                      | not dimmable       |
| Voltage                          | 220-240V 50/60Hz   |
| Length [mm]                      | 61,6               |
| Width [mm]                       | 30                 |
| Height [mm]                      | 285                |
| Length pendant [mm]              | 2000               |
| IP protection class              | IP20               |
| IP protection class              | protection cl. II  |
| Material                         | gypsum             |
| Colour of body                   | white              |
| RAL                              | 9003               |
| Colour of adapter / ceiling base | grey               |
| Cable                            | white              |
| Lifetime [h]                     | L80 B10 20 000     |
| Energy efficiency class          | F                  |
| Net weight [kg]                  | 0.98               |
| EAN number                       | 9010506773866      |

## LIGHT DISTRIBUTION CURVE

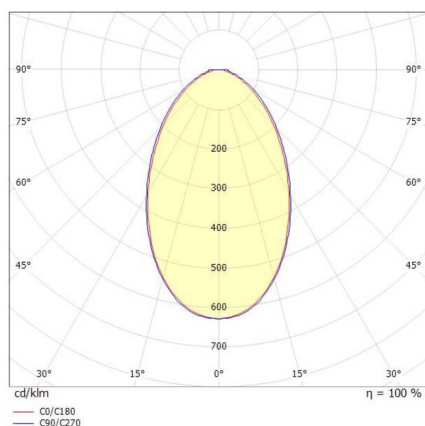

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.