


TUNE

157-0215070114442

TUNE M PC MASTER 345 HIGH-BAY REFLECTOR LUMINAIRE made of aluminium, silver, similar to RAL 9006, high quality plastic lens beam 75°, accessoire: PC, light output direct, UGR <25, with converter, max. 4150mA, dimmability: DALI 2, motion swarm, with motion detector, day light control and swarm function, IP65 incl. power supply for sensor standalone versions; rectangular detection



SKETCH

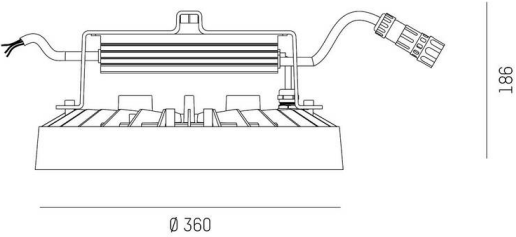


TECHNICAL DETAILS

|                           |                                                            |
|---------------------------|------------------------------------------------------------|
| Light source              | LED                                                        |
| System performance [W]    | 205                                                        |
| Luminous flux [lm]        | 29070                                                      |
| Current sec. [mA]         | 4150                                                       |
| Colour temperature        | 4000K                                                      |
| CRI                       | >80                                                        |
| UGR                       | <25                                                        |
| Optics                    | high quality plastic lens                                  |
| Converter                 | with converter                                             |
| Dimmability               | DALI 2, motion swarm                                       |
| Light emission area       | direct                                                     |
| Beam angle [°]            | 75°                                                        |
| Voltage                   | 220-240V 50/60Hz                                           |
| Motion detector           | with motion detector, day light control and swarm function |
| Length [mm]               | 477,8                                                      |
| Height [mm]               | 186                                                        |
| Diameter [mm]             | 360                                                        |
| IP protection class       | IP65                                                       |
| IP protection class       | protection cl. I                                           |
| IK value                  | IK10                                                       |
| Material                  | aluminium                                                  |
| Colour of body            | grey                                                       |
| RAL                       | 9006                                                       |
| Lifetime [h]              | L80 B10 70 000                                             |
| Ambient temperature       | from -30° to +45°                                          |
| Energy efficiency class   | D                                                          |
| Number of luminaires B16A | 7                                                          |
| IFS                       | True                                                       |
| Net weight [kg]           | 3.79                                                       |
| EAN number                | 9010506878073                                              |



Energy label

LIGHT DISTRIBUTION CURVE

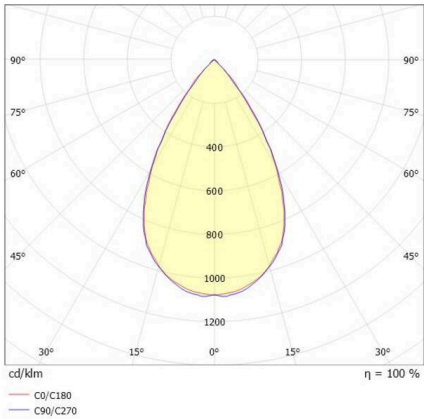

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.