

TUNE

157-0216100116442

TUNE M PC EXTENSION HIGH-BAY REFLECTOR LUMINAIRE made of aluminium, silver, similar to RAL 9006, high quality plastic lens beam 75°, accessoire: PC, light output direct, UGR <22, with converter, max. 3300mA, dimmability: DALI 2, motion swarm, IP55 incl. power supply for sensor standalone versions



TECHNICAL DETAILS


|                        |                           |
|------------------------|---------------------------|
| Light source           | LED                       |
| System performance [W] | 165                       |
| Luminous flux [lm]     | 23960                     |
| Current sec. [mA]      | 3300                      |
| Colour temperature     | 6500K                     |
| CRI                    | >80                       |
| UGR                    | <22                       |
| Optics                 | high quality plastic lens |
| Converter              | with converter            |
| Dimmability            | DALI 2, motion swarm      |
| Light emission area    | direct                    |
| Beam angle             | 75°                       |
| Voltage                | 220-240V 50/60Hz          |

|                     |                  |
|---------------------|------------------|
| Length [mm]         | 362,1            |
| Height [mm]         | 186              |
| Diameter [mm]       | 360              |
| IP protection class | IP55             |
| IP protection class | protection cl. I |
| IK value            | IK10             |

|                           |                   |
|---------------------------|-------------------|
| Material                  | aluminium         |
| Colour of body            | grey              |
| RAL                       | 9006              |
| Lifetime [h]              | L80 B10 70 000    |
| Ambient temperature       | from -30° to +45° |
| Energy efficiency class   | D                 |
| Number of luminaires B16A | 7                 |
| IFS                       | True              |


|                 |               |
|-----------------|---------------|
| Net weight [kg] | 2.21          |
| EAN number      | 9010506916744 |

SKETCH

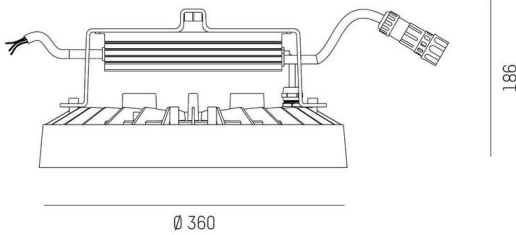

Energy label

LIGHT DISTRIBUTION CURVE

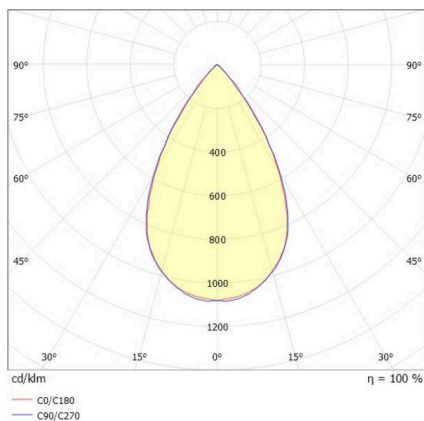

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.