


VARIDO 2

149-00203011904p

VARIDO 2 ASYM TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of steel sheet, grey, similar to RAL 9004, decor grey, Lens optics with vacuum deposited synthetic reflector beam asymmetric, light output direct, swiveling 350°, with converter, max. 1050mA, dimmability: Pulse-DALI, adapter/ceiling base grey, IP20




SKETCH

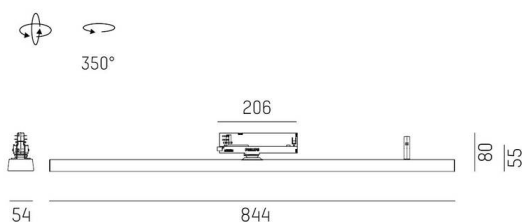

TECHNICAL DETAILS

Light source	LED
System performance [W]	31
Luminous flux [lm]	3150
Current sec. [mA]	1050
Colour temperature	3000K
CRI	>80
Optics	Lens optics with vacuum deposited synthetic reflector with converter
Converter	Pulse-DALI
Dimmability	direct
Light emission area	asymmetric
Beam angle [°]	220-240V 50/60Hz
Voltage	
Length [mm]	844
Width [mm]	54
Height [mm]	24
IP protection class	IP20
IP protection class	protection cl. II
Material	steel sheet
Colour of body	grey
RAL	9004
Colour of adapter / ceiling base	grey
Colour of decor	grey
Lifetime [h]	L80 B10 50 000
Energy efficiency class	C
Number of luminaires B16A	50
Net weight [kg]	1.56
EAN number	9010506999433

LIGHT DISTRIBUTION CURVE

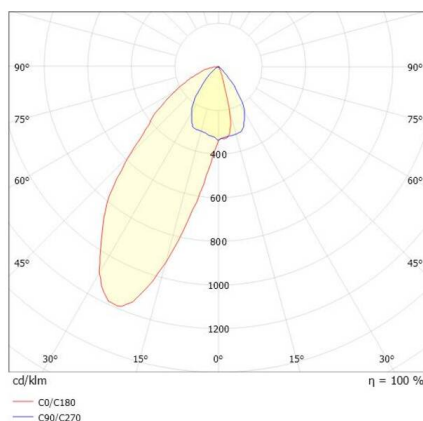

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.