

VALO

720-004420149550

VALO SYSTEM DOUBLE SPOT SYSTEM SPOTLIGHT white, similar to RAL 9016,high-efficiently vacuum deposited synthetic reflector beam 24°, light output direct, swiveling 355°, tilting 35°, with converter, max. 350mA, dimmability: not dimmable, adapter/ceiling base white, IP20




SKETCH



TECHNICAL DETAILS

| | |
|----------------------------------|--------------------------------------|
| Light source | LED |
| System performance [W] | 14 |
| Luminous flux [lm] | 1400 |
| Current sec. [mA] | 350 |
| Colour temperature | 3000K |
| CRI | PREMIUM>90 |
| Optics | vacuum deposited synthetic reflector |
| Converter | with converter |
| Dimmability | not dimmable |
| Light emission area | direct |
| Beam angle | 24° |
| Voltage | 48 VDC |
| Length [mm] | 170 |
| Width [mm] | 150 |
| Height [mm] | 37 |
| Diameter [mm] | 28 |
| IP protection class | IP20 |
| IP protection class | protection cl. II |
| IK value | IK04 |
| Colour of body | white |
| RAL | 9016 |
| Colour of adapter / ceiling base | white |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency class | D |
| Net weight [kg] | 0.27 |
| EAN number | 9010506239522 |

LIGHT DISTRIBUTION CURVE

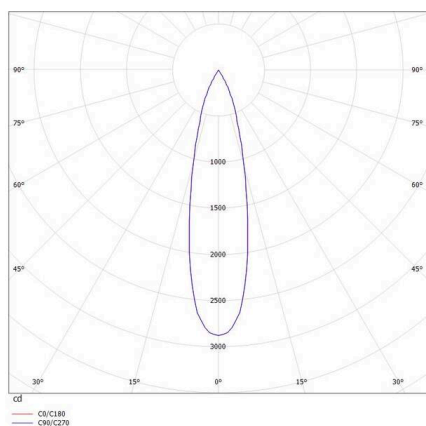

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.