


LOG OUT UP & DOWN

528-2610ddd

LOG OUT UP/DOWN SYSTEM INSERT LIGHT INSERT made of metal, white, similar to RAL 9016, with converter, max. 350mA, dimmability: DALI, through wiring 3x1,5mm² + 2x1,0mm², IP20



SKETCH

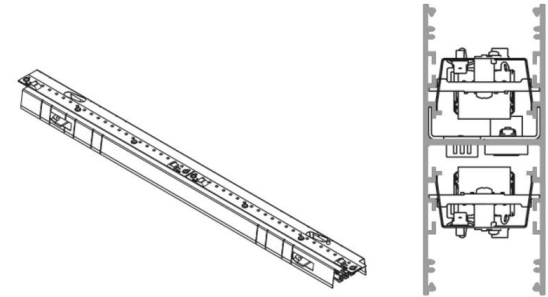

TECHNICAL DETAILS

Light source	LED
System performance [W]	34
Luminous flux [lm]	4580
Current sec. [mA]	350
Colour temperature	4000K
CRI	>80
Converter	with converter
Dimmability	DALI
Voltage	220-240V 50/60Hz
Through wiring	3x1,5mm ² + 2x1,0mm ²
Length [mm]	1428
Width [mm]	49
Height [mm]	38
IP protection class	IP20
IP protection class	protection cl. I
Material	metal
Colour of body	white
RAL	9016
Energy efficiency class	D
Net weight [kg]	1.49
EAN number	9008905234125



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.