


## LOG IN/OUT NG1

528-2010

LOG OUT UP/DOWN SYSTEM INSERT LIGHT INSERT made of metal, white, similar to RAL 9016, with converter, dimmability: not dimmable, through wiring 3x1,5mm<sup>2</sup>, IP20



## SKETCH

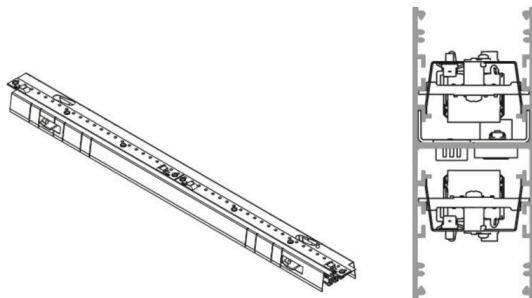

## TECHNICAL DETAILS

|                         |                      |
|-------------------------|----------------------|
| Light source            | LED                  |
| System performance [W]  | 15                   |
| Luminous flux [lm]      | 1830                 |
| Colour temperature      | 4000K                |
| CRI                     | >80                  |
| Converter               | with converter       |
| Dimmability             | not dimmable         |
| Voltage                 | 220-240V 50/60Hz     |
| Through wiring          | 3x1,5mm <sup>2</sup> |
| Length [mm]             | 571                  |
| Width [mm]              | 49                   |
| Height [mm]             | 38                   |
| IP protection class     | IP20                 |
| IP protection class     | protection cl. I     |
| Material                | metal                |
| Colour of body          | white                |
| RAL                     | 9016                 |
| Energy efficiency class | D                    |
| Net weight [kg]         | 0.56                 |
| EAN number              | 9008905214509        |



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.