


# LOG OUT UP & DOWN

528-259ddd

LOG OUT UP/DOWN SYSTEM INSERT LIGHT INSERT made of metal, white, similar to RAL 9016, with converter, max. 350mA, dimmability: DALI, through wiring 3x1,5mm<sup>2</sup> + 2x1,0mm<sup>2</sup>, IP20



## SKETCH

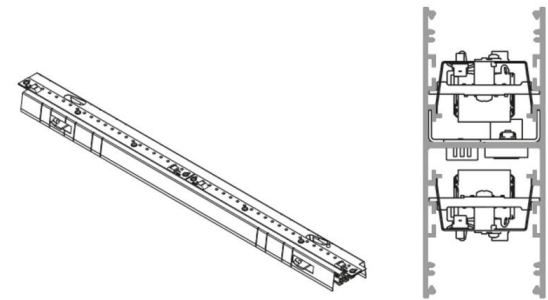

## TECHNICAL DETAILS

|                         |                                             |
|-------------------------|---------------------------------------------|
| Light source            | LED                                         |
| System performance [W]  | 27                                          |
| Luminous flux [lm]      | 3470                                        |
| Current sec. [mA]       | 350                                         |
| Colour temperature      | 3000K                                       |
| CRI                     | >80                                         |
| Converter               | with converter                              |
| Dimmability             | DALI                                        |
| Voltage                 | 220-240V 50/60Hz                            |
| Through wiring          | 3x1,5mm <sup>2</sup> + 2x1,0mm <sup>2</sup> |
| Length [mm]             | 1143                                        |
| Width [mm]              | 49                                          |
| Height [mm]             | 38                                          |
| IP protection class     | IP20                                        |
| IP protection class     | protection cl. I                            |
| Material                | metal                                       |
| Colour of body          | white                                       |
| RAL                     | 9016                                        |
| Energy efficiency class | D                                           |
| Net weight [kg]         | 1.25                                        |
| EAN number              | 9008905234286                               |



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.