



LOG 50

716-0307144249660

LOG 50 SPOT R RECESSED WALL / CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, decor black,high-efficiently vacuum deposited synthetic reflector beam 24°, light output direct, with converter, max. 450mA, dimmability: not dimmable, through wiring 3x1,5mm², IP20

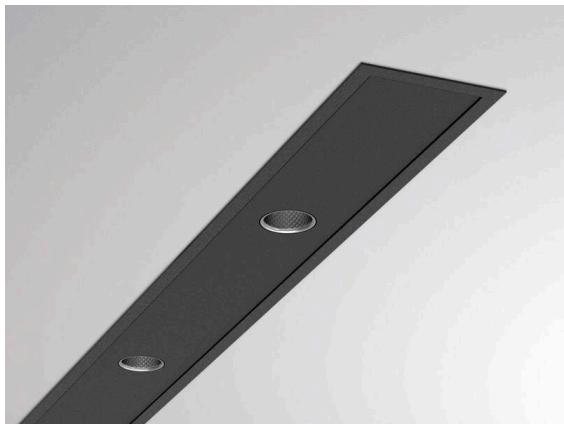


SKETCH

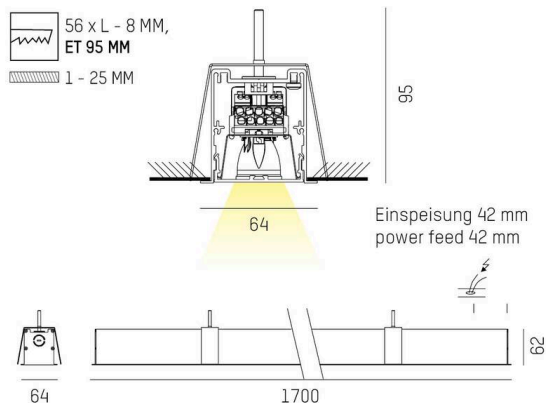

TECHNICAL DETAILS

Light source	LED
System performance [W]	36
Luminous flux [lm]	3320
Current sec. [mA]	450
Colour temperature	3000K
CRI	PREMIUM>90
Optics	vacuum deposited synthetic reflector
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	24°
Voltage	220-240V 50/60Hz
Through wiring	3x1,5mm²
Length [mm]	1700
Width [mm]	64
Height [mm]	95
Ceiling cutout [mm]	1692x56
Ceiling thickness [mm]	1-25
Mounting depth [mm]	95
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black
RAL	9005
Colour of decor	black
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	25
Net weight [kg]	5.36
EAN number	9010506556452

LIGHT DISTRIBUTION CURVE

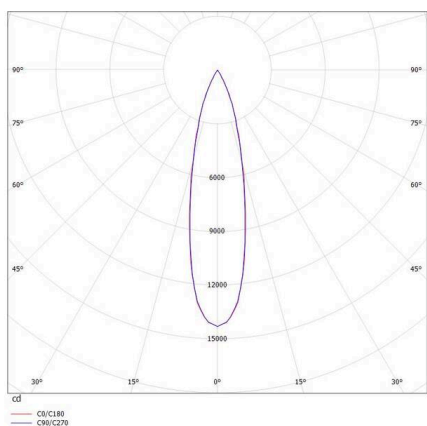

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.