


THE LINE

536-215198

THE LINE SD WALL / CEILING LUMINAIRE natural aluminium, satined PMMA opal diffuser with converter, dimmability: not dimmable, IP20




SKETCH

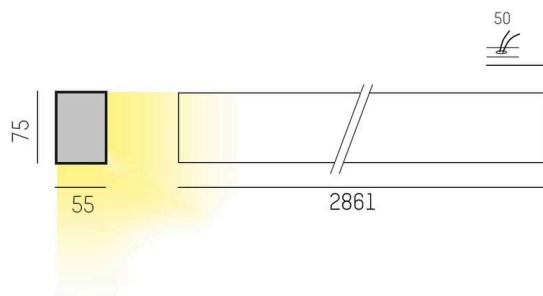

TECHNICAL DETAILS

|                        |                                   |
|------------------------|-----------------------------------|
| Light source           | LED                               |
| System performance [W] | 85                                |
| Luminous flux [lm]     | 9100                              |
| Colour temperature     | 3000K                             |
| CRI                    | >80                               |
| Optics                 | PMMA opal diffuser with converter |
| Converter              | with converter                    |
| Dimmability            | not dimmable                      |
| Voltage                | 220-240V 50/60Hz                  |
| Length [mm]            | 2861                              |
| Width [mm]             | 55                                |
| Height [mm]            | 75                                |
| IP protection class    | IP20                              |
| IP protection class    | protection cl. I                  |
| IK value               | IK02                              |
| Colour of body         | natural aluminium                 |
| Lifetime [h]           | L80 B10 50 000                    |
| Net weight [kg]        | 7.20                              |
| EAN number             | 9008905595790                     |

LIGHT DISTRIBUTION CURVE

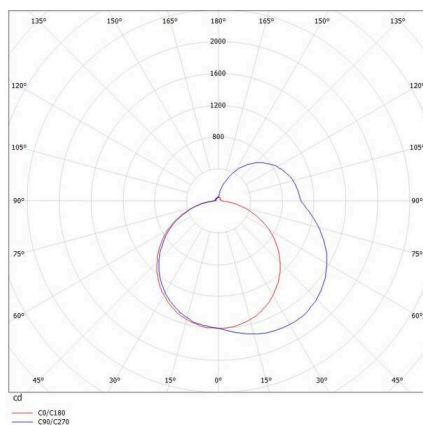

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.