


THE LINE

536-212198

THE LINE SD WALL / CEILING LUMINAIRE natural aluminium, satined PMMA opal diffuser with converter, dimmability: not dimmable, IP20




SKETCH

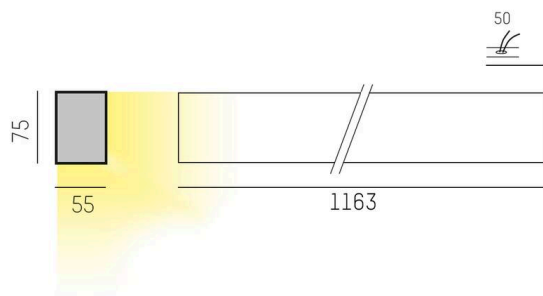

TECHNICAL DETAILS

| | |
|------------------------|-----------------------------------|
| Light source | LED |
| System performance [W] | 34 |
| Luminous flux [lm] | 3640 |
| Colour temperature | 3000K |
| CRI | >80 |
| Optics | PMMA opal diffuser with converter |
| Converter | with converter |
| Dimmability | not dimmable |
| Voltage | 220-240V 50/60Hz |
| Length [mm] | 1163 |
| Width [mm] | 55 |
| Height [mm] | 75 |
| IP protection class | IP20 |
| IP protection class | protection cl. I |
| IK value | IK02 |
| Colour of body | natural aluminium |
| Lifetime [h] | L80 B10 50 000 |
| Net weight [kg] | 3.05 |
| EAN number | 9008905591105 |

LIGHT DISTRIBUTION CURVE

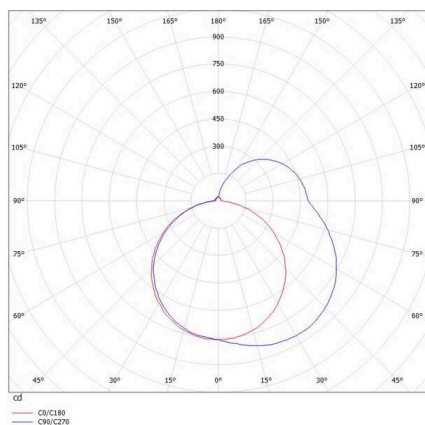

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.