


BLIND SPOT


640-00201032900

BLINDSPOT R RECESSED SPOTLIGHT made of aluminium, natural, anti-glare LFO lens due to microfaceted structure beam 55°, light output direct, UGR <16, without converter, max. 700mA, dimmability: see converter, IP20 please order accessories separately,

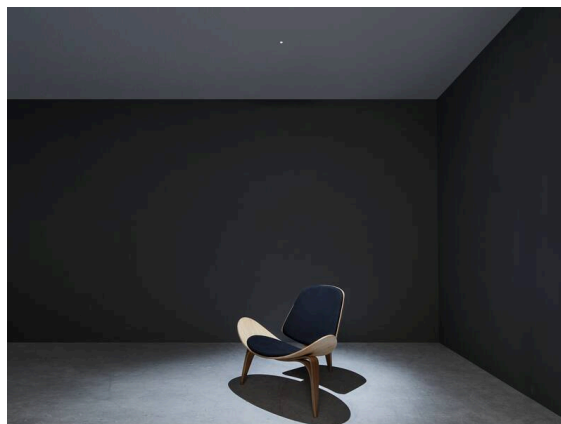

SKETCH

12,5 - 32mm
68 mm, ET 100mm



TECHNICAL DETAILS

Light source	LED 9W
Luminous flux [lm]	430
Current sec. [mA]	700
Colour temperature	3000K
CRI	>90
UGR	<16
Optics	LFO lens
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	55°

Length [mm]	61
Height [mm]	69
Diameter [mm]	61
Ceiling cutout [mm]	68
Ceiling thickness [mm]	12,5 - 32
Mounting depth [mm]	100
IP protection class	IP20
IP protection class	protection cl. II


Material	aluminium
Colour of body	natural
Lifetime [h]	L80 B10 50 000
Energy efficiency class	G

Net weight [kg]	0.15
EAN number	9008905740299



Energy label

LIGHT DISTRIBUTION CURVE

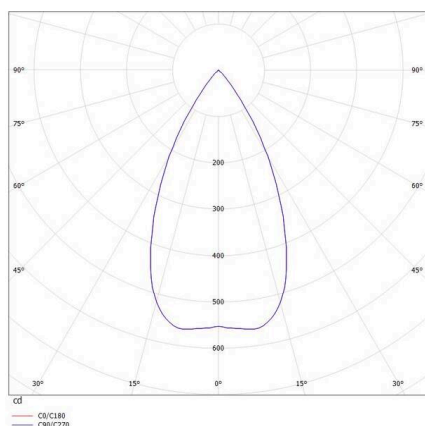

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.