BLIND SPOT

640-00101032366

BLINDSPOT TURN R RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005,anti-glare LFO lens due to microfacetted structure beam 55°, light output direct, UGR <16, swiveling 172°, tilting 30°, without converter, max. 700mA, dimmability: see converter, IP20 please order accessories separately





Sketch

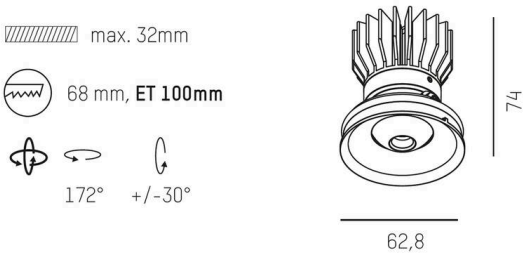

Technical details

Light source	LED 9W
Luminous flux [lm]	400
Current sec. [mA]	700
Colour temperature	2700K
CRI	>90
UGR	<16
Optics	LFO lens
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	55°
Length [mm]	62,8
Height [mm]	74
Diameter [mm]	62,8
Ceiling cutout [mm]	68
Ceiling thickness [mm]	32
Mounting depth [mm]	100
IP protection class	IP20
IP protection class	protection cl. II
Material	aluminium
Colour of body	black
RAL	9005
Lifetime [h]	L80 B10 50 000
Energy efficiency class	G
Net weight [kg]	0.28
EAN number	9008905740336

Light distribution curve

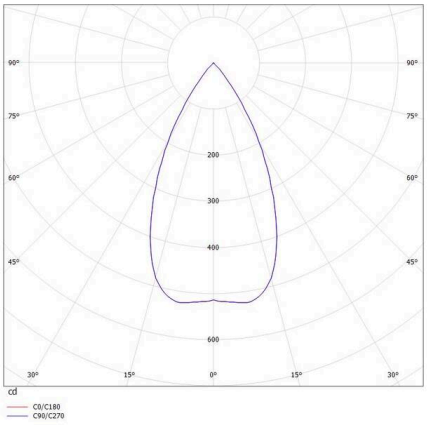

Energy label

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.