


NOW 2

635-21204895ng6

NOW 2 SQUARE R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9016, high-efficiently vacuum deposited aluminium reflector beam 40°, light output direct, tilting 30°, with converter, max. 350mA, dimmability: not dimmable, IP20

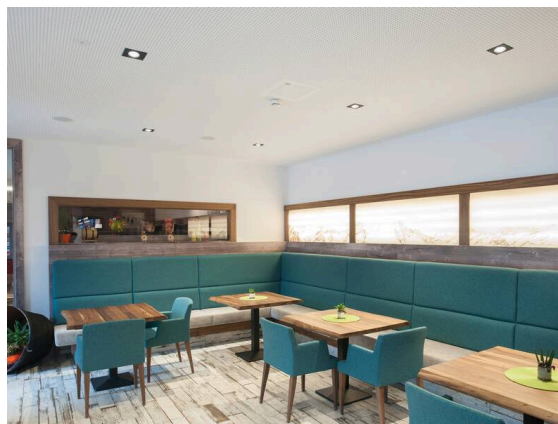


SKETCH

 1 - 20mm

 115 mm, ET 120 mm


 30°

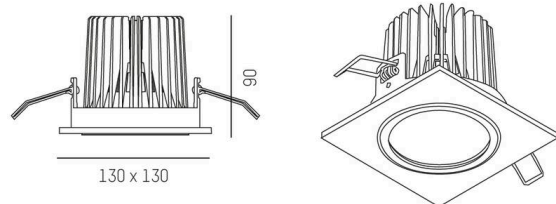

TECHNICAL DETAILS

Light source	LED
System performance [W]	14
Luminous flux [lm]	1350
Current sec. [mA]	350
Colour temperature	3000K
CRI	PREMIUM >90
Optics	vacuum deposited aluminium reflector
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	40°
Voltage	110-240V 50/60Hz
Length [mm]	130
Width [mm]	130
Height [mm]	90
Ceiling cutout [mm]	115
Ceiling thickness [mm]	1-20
Mounting depth [mm]	120
IP protection class	IP20
IP protection class	protection cl. II
Material	aluminium
Colour of body	white
RAL	9016
Lifetime [h]	L80 B10 50 000
Net weight [kg]	0.69
EAN number	9008905634376

LIGHT DISTRIBUTION CURVE

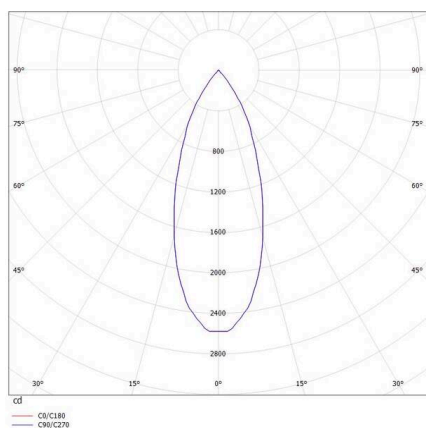

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.