


TOUCH DOWN

692-00101054966dv2


TOUCH DOWN PD SUSPENSION black, similar to RAL 9005, high-efficiently vacuum deposited aluminium reflector beam 24°, light output direct, with converter, max. 700mA, dimmability: DALI, cable transparent, adapter/ceiling base black, pendant length 1500mm, IP20



SKETCH

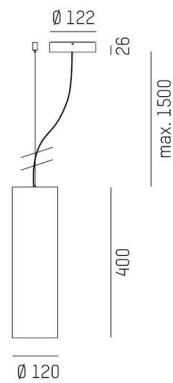

LIGHT DISTRIBUTION CURVE

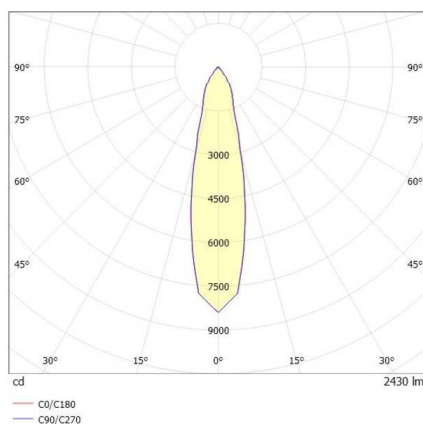

TECHNICAL DETAILS

Light source	LED
System performance [W]	25
Luminous flux [lm]	2430
Current sec. [mA]	700
Colour temperature	3000K
CRI	PREMIUM >90
Optics	vacuum deposited aluminium reflector with converter
Converter	DALI
Dimmability	direct
Light emission area	24°
Beam angle [°]	220-240V 50/60Hz
Voltage	
Height [mm]	400
Length pendant [mm]	1500
Diameter [mm]	120
IP protection class	IP20
IP protection class	protection cl. I
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Cable	transparent
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	34
Net weight [kg]	2.32
EAN number	9010870130791



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.