



TOUCH DOWN

692-001010949660v2

TOUCH DOWN PD SUSPENSION black, similar to RAL 9005, high-efficiently vacuum deposited aluminium reflector beam 60°, light output direct, with converter, max. 700mA, dimmability: not dimmable, cable transparent, adapter/ceiling base black, pendant length 1500mm, IP20

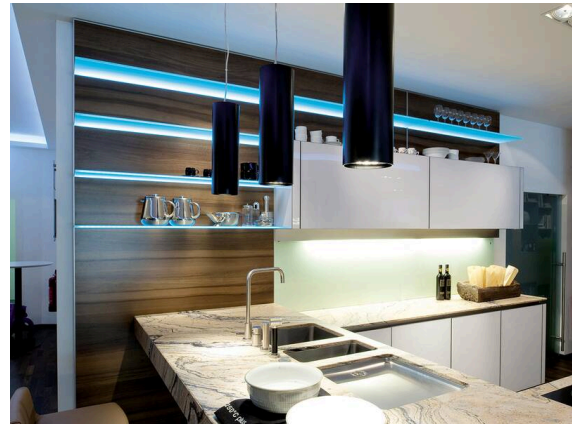


SKETCH

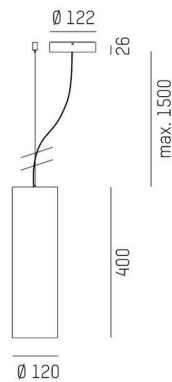

TECHNICAL DETAILS

Light source	LED
System performance [W]	25
Luminous flux [lm]	2540
Current sec. [mA]	700
Colour temperature	3000K
CRI	PREMIUM >90
Optics	vacuum deposited aluminium reflector
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle [°]	60°
Voltage	220-240V 50/60Hz
Height [mm]	400
Length pendant [mm]	1500
Diameter [mm]	120
IP protection class	IP20
IP protection class	protection cl. I
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Cable	transparent
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	34
Net weight [kg]	2.33
EAN number	9010870130869

LIGHT DISTRIBUTION CURVE

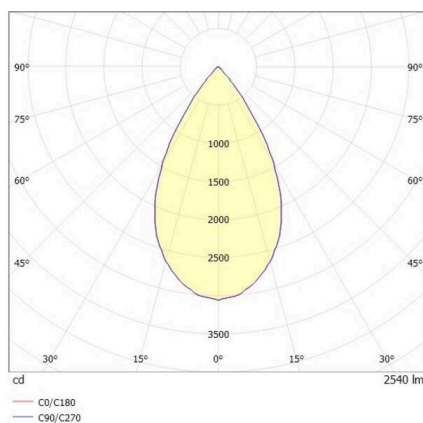

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.