



LOG 50 RING

722-010190211305000

LOG 50 RING 180° SD WALL / CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, satined PMMA opal diffuser light output direct, with converter, max. 700mA, dimmability: not dimmable, through wiring 3x1,5mm², IP20




SKETCH



TECHNICAL DETAILS

|                           |                    |
|---------------------------|--------------------|
| Light source              | LED                |
| System performance [W]    | 65                 |
| Luminous flux [lm]        | 8330               |
| Current sec. [mA]         | 700                |
| Colour temperature        | 2700K              |
| CRI                       | >80                |
| Optics                    | PMMA opal diffuser |
| Converter                 | with converter     |
| Dimmability               | not dimmable       |
| Light emission area       | direct             |
| Voltage                   | 220-240V 50/60Hz   |
| Through wiring            | 3x1,5mm²           |
| Length [mm]               | 1840               |
| Width [mm]                | 52                 |
| Height [mm]               | 65                 |
| Diameter [mm]             | 1840               |
| IP protection class       | IP20               |
| IP protection class       | protection cl. I   |
| IK value                  | IK03               |
| Material                  | aluminium          |
| Colour of body            | white              |
| RAL                       | 9016               |
| Lifetime [h]              | L80 B10 50 000     |
| Energy efficiency class   | C                  |
| Number of luminaires B16A | 25                 |
| Net weight [kg]           | 6.35               |
| EAN number                | 9010870239494      |

LIGHT DISTRIBUTION CURVE

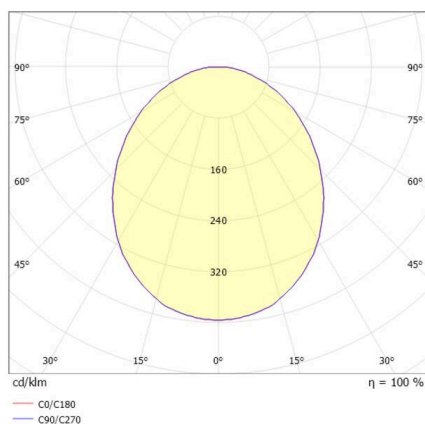

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.