


# RIDE SYSTEM

577-003010524050

RIDE RDB SYSTEM INSERT LIGHT INSERT made of die-cast aluminium, white, similar to RAL 9016, light output direct, with converter, max. 500mA, dimmability: not dimmable, through wiring 3x0,75mm², IP20




## SKETCH

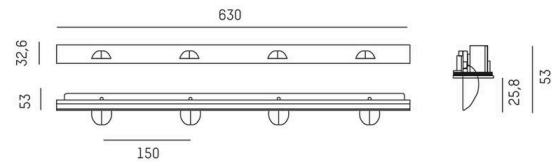

## TECHNICAL DETAILS

|                        |                    |
|------------------------|--------------------|
| Light source           | LED                |
| System performance [W] | 28                 |
| Luminous flux [lm]     | 1720               |
| Current sec. [mA]      | 500                |
| Colour temperature     | 4000K              |
| CRI                    | >80                |
| Converter              | with converter     |
| Dimmability            | not dimmable       |
| Light emission area    | direct             |
| Voltage                | 220-240V 50/60Hz   |
| Through wiring         | 3x0,75mm²          |
| Width [mm]             | 32,6               |
| Height [mm]            | 53                 |
| IP protection class    | IP20               |
| IP protection class    | protection cl. I   |
| Material               | die-cast aluminium |
| Colour of body         | white              |
| RAL                    | 9016               |
| Lifetime [h]           | L80 B10 50 000     |
| Net weight [kg]        | 0.44               |
| EAN number             | 9008905723872      |

## LIGHT DISTRIBUTION CURVE

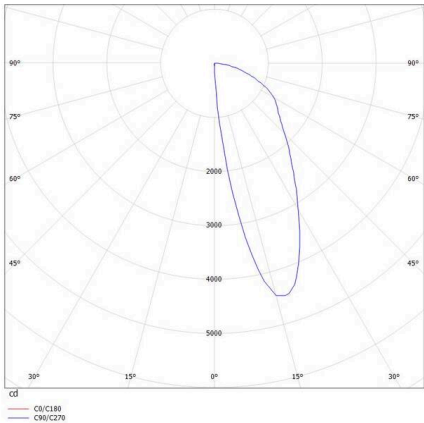

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.