

RIDE


577-006020129050

RIDE SPOT 2 R RECESSED SPOTLIGHT made of die-cast aluminium, white, similar to RAL 9016, high quality glass lens beam 12°, light output direct, swiveling 350°, tilting 35°, with converter, dimmability: not dimmable, IP20



SKETCH

68 mm, ET: 75mm

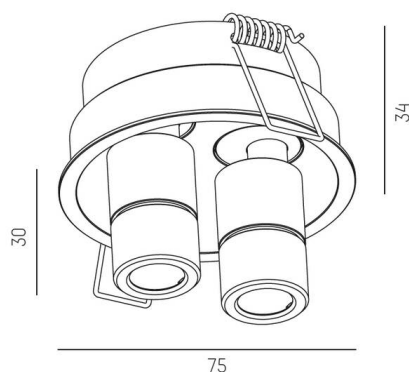

TECHNICAL DETAILS


Light source	LED
System performance [W]	7
Luminous flux [lm]	310
Colour temperature	3000K
CRI	>90
Optics	high quality glass lens
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	12°
Voltage	220-240V 50/60Hz

Length [mm]	75
Height [mm]	64
Diameter [mm]	75
Ceiling cutout [mm]	68
Ceiling thickness [mm]	1-20mm
Mounting depth [mm]	75
IP protection class	IP20
IP protection class	protection cl. II

Material	die-cast aluminium
Colour of body	white
RAL	9016
Lifetime [h]	L80 B10 50 000
Energy efficiency class	G
Number of luminaires B16A	50

Net weight [kg]	0.82
EAN number	9008905677342

LIGHT DISTRIBUTION CURVE

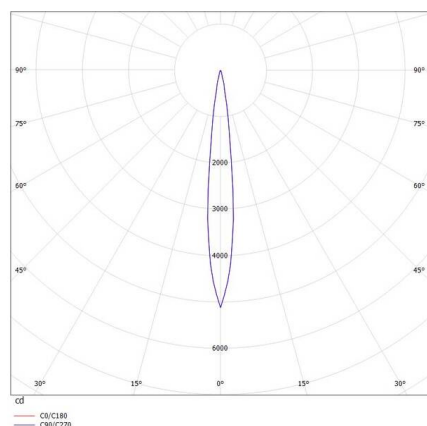

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.