
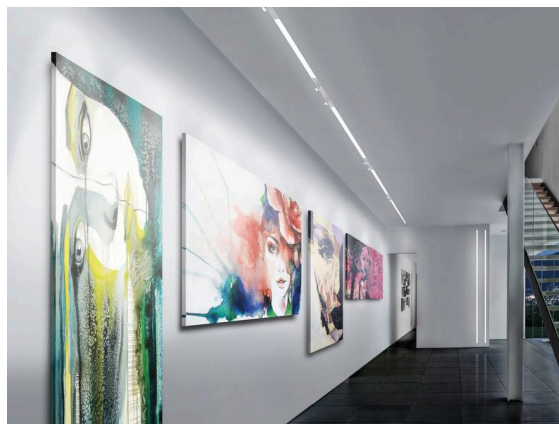



RIDE SYSTEM

577-00201022905

RIDE SPOT 2 SYSTEM INSERT LIGHT INSERT made of die-cast aluminium, white, similar to RAL 9016, high quality glass lens beam 29°, light output direct, swiveling 350°, tilting 35°, with converter, dimmability: not dimmable, through wiring 3x0,75mm², IP20

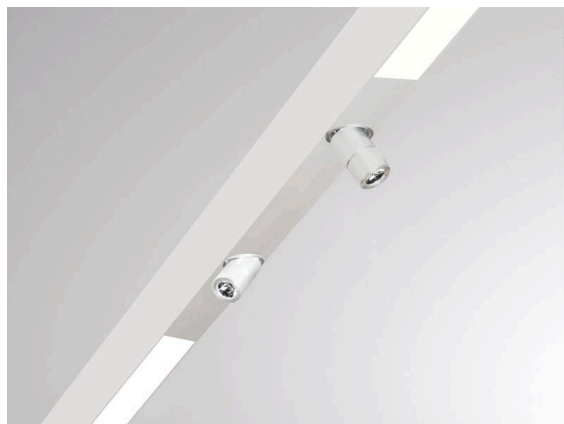

Sketch

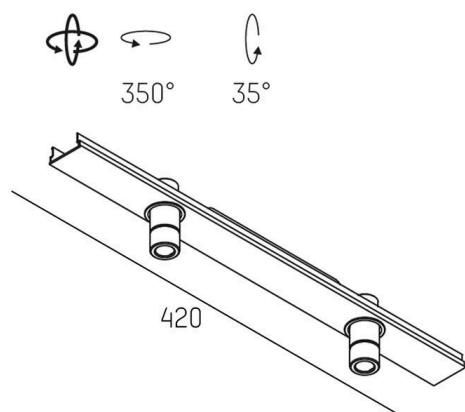

Technical details

Light source	LED
System performance [W]	7
Luminous flux [lm]	310
Colour temperature	3000K
CRI	>90
Optics	high quality glass lens
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	29°
Voltage	220-240V 50/60Hz
Through wiring	3x0,75mm²
Length [mm]	420
Height [mm]	60
IP protection class	IP20
IP protection class	protection cl. I
Material	die-cast aluminium
Colour of body	white
RAL	9016
Lifetime [h]	L80 B10 50 000
Energy efficiency class	G
Net weight [kg]	0.57
EAN number	9008905677601



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.

Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.