

## RIDE


577-006020123060

RIDE SPOT 2 R RECESSED SPOTLIGHT made of die-cast aluminium, black, similar to RAL 9005, high quality glass lens beam 12°, light output direct, swiveling 350°, tilting 35°, with converter, dimmability: not dimmable, IP20



## SKETCH

68 mm, ET: 75mm

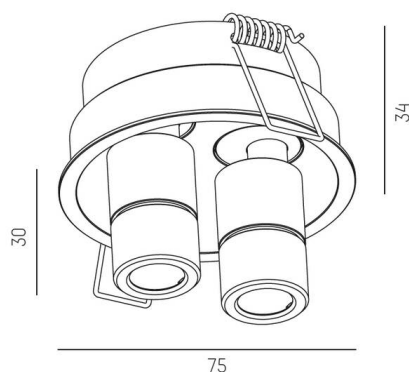

## TECHNICAL DETAILS

|                        |                         |
|------------------------|-------------------------|
| Light source           | LED                     |
| System performance [W] | 7                       |
| Luminous flux [lm]     | 290                     |
| Colour temperature     | 2700K                   |
| CRI                    | >90                     |
| Optics                 | high quality glass lens |
| Converter              | with converter          |
| Dimmability            | not dimmable            |
| Light emission area    | direct                  |
| Beam angle             | 12°                     |
| Voltage                | 220-240V 50/60Hz        |

|                        |                   |
|------------------------|-------------------|
| Length [mm]            | 75                |
| Height [mm]            | 64                |
| Diameter [mm]          | 75                |
| Ceiling cutout [mm]    | 68                |
| Ceiling thickness [mm] | 1-20mm            |
| Mounting depth [mm]    | 75                |
| IP protection class    | IP20              |
| IP protection class    | protection cl. II |


|                           |                    |
|---------------------------|--------------------|
| Material                  | die-cast aluminium |
| Colour of body            | black              |
| RAL                       | 9005               |
| Lifetime [h]              | L80 B10 50 000     |
| Energy efficiency class   | G                  |
| Number of luminaires B16A | 50                 |

|                 |               |
|-----------------|---------------|
| Net weight [kg] | 0.78          |
| EAN number      | 9008905677724 |



Energy label

## LIGHT DISTRIBUTION CURVE

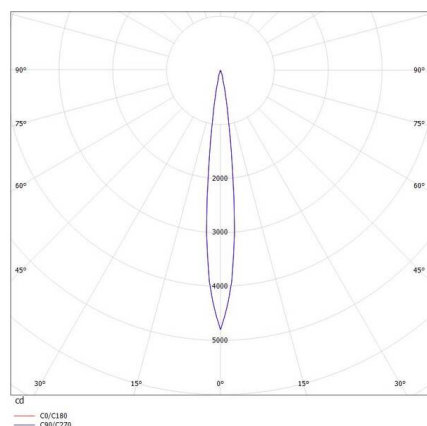

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.