


MAGNETICS

708-10301302906d

MAGNETICS GRID EINSATZ SYSTEM LIGHT INSERT WITH 24V ADAPTER made of synthetic, chrome, linear optics beam asymmetric, light output direct, without converter, dimmability: DALI, IP20




SKETCH

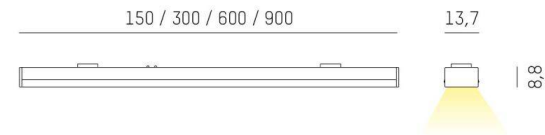

TECHNICAL DETAILS

Light source	LED
System performance [W]	4
Luminous flux [lm]	210
Colour temperature	3000K
CRI	>90
Optics	high quality linear optics
Converter	without converter
Dimmability	DALI
Light emission area	direct
Beam angle [°]	asymmetric
Voltage	24 VDC
Length [mm]	150
Width [mm]	13,7
Height [mm]	8,8
IP protection class	IP20
IP protection class	protection cl. III
IK value	IK03
Material	synthetic
Colour of body	chrome
Lifetime [h]	L80 B10 50 000
Energy efficiency class	G
Net weight [kg]	0.27
EAN number	9010506957457

LIGHT DISTRIBUTION CURVE

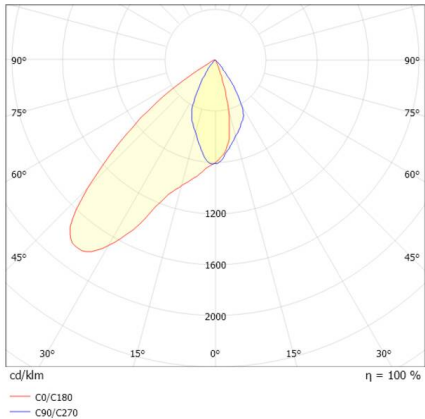

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.