


**MAGNETICS**

**708-10303402706d**

MAGNETICS DARK EINSATZ SYSTEM LIGHT INSERT WITH 24V ADAPTER made of PMMA, black, PMMA Dark diffuser beam 90°, light output direct, without converter, dimmability: DALI, IP20




**SKETCH**

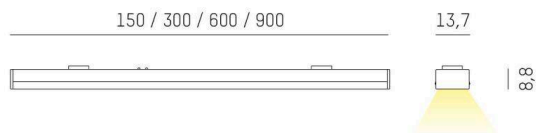

**TECHNICAL DETAILS**

|                         |                    |
|-------------------------|--------------------|
| Light source            | LED                |
| System performance [W]  | 4                  |
| Luminous flux [lm]      | 100                |
| Colour temperature      | 3500K              |
| CRI                     | >90                |
| Optics                  | PMMA Dark diffuser |
| Converter               | without converter  |
| Dimmability             | DALI               |
| Light emission area     | direct             |
| Beam angle              | 90°                |
| Voltage                 | 24 VDC             |
| Length [mm]             | 299,5              |
| Width [mm]              | 13,7               |
| Height [mm]             | 8,8                |
| IP protection class     | IP20               |
| IP protection class     | protection cl. III |
| IK value                | IK03               |
| Material                | PMMA               |
| Colour of body          | black              |
| Lifetime [h]            | L80 B10 50 000     |
| Energy efficiency class | F                  |
| Net weight [kg]         | 0.35               |
| EAN number              | 9010506957907      |

**LIGHT DISTRIBUTION CURVE**

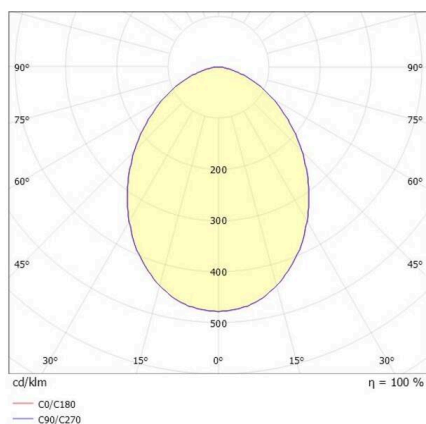

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.