


## MAGNETICS

708-10306402906d

MAGNETICS DARK EINSATZ SYSTEM LIGHT INSERT WITH 24V ADAPTER made of PMMA, satined black, PMMA Dark diffuser beam 90°, light output direct, without converter, dimmability: DALI, IP20

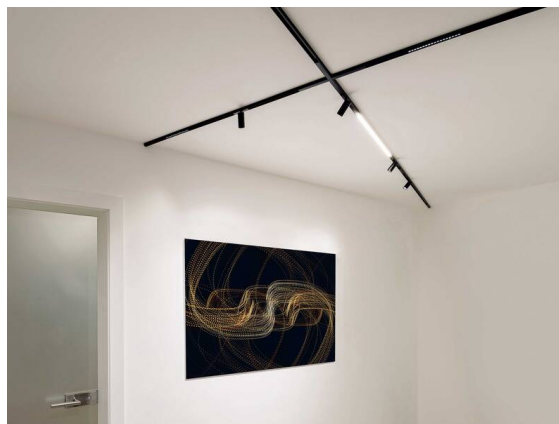

## SKETCH



## TECHNICAL DETAILS

|                        |                    |
|------------------------|--------------------|
| Light source           | LED                |
| System performance [W] | 6                  |
| Luminous flux [lm]     | 150                |
| Colour temperature     | 3000K              |
| CRI                    | >90                |
| Optics                 | PMMA Dark diffuser |
| Converter              | without converter  |
| Dimmability            | DALI               |
| Light emission area    | direct             |
| Beam angle             | 90°                |
| Voltage                | 24 VDC             |

|                     |                    |
|---------------------|--------------------|
| Length [mm]         | 449,6              |
| Width [mm]          | 13,7               |
| Height [mm]         | 8,8                |
| IP protection class | IP20               |
| IP protection class | protection cl. III |
| IK value            | IK03               |


|                         |                |
|-------------------------|----------------|
| Material                | PMMA           |
| Colour of body          | black          |
| Lifetime [h]            | L80 B10 50 000 |
| Energy efficiency class | F              |

|                 |               |
|-----------------|---------------|
| Net weight [kg] | 0.41          |
| EAN number      | 9010506958133 |



Energy label

## LIGHT DISTRIBUTION CURVE

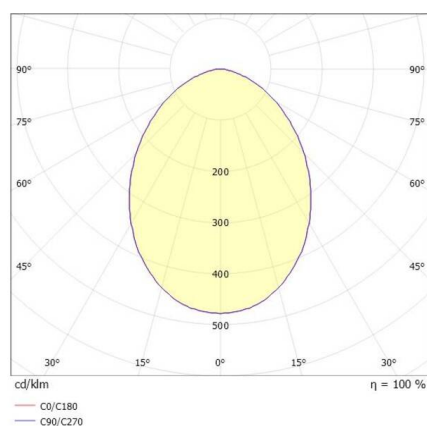

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.