


# RIDE RING

675-10101102905d

RIDE RING SD WALL / CEILING LUMINAIRE made of die-cast aluminium, white, similar to RAL 9016, satined PMMA diffuser for homogeneous illumination light output direct, with converter, max. 500mA, dimmability: DALI, IP20




## SKETCH

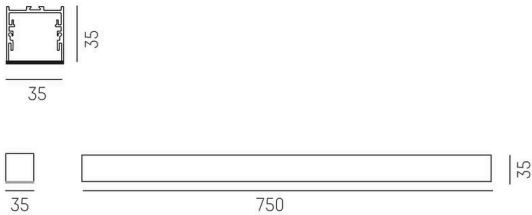

## TECHNICAL DETAILS

|                           |                                        |
|---------------------------|----------------------------------------|
| Light source              | LED                                    |
| System performance [W]    | 38                                     |
| Luminous flux [lm]        | 3590                                   |
| Current sec. [mA]         | 500                                    |
| Colour temperature        | 3000K                                  |
| CRI                       | >90                                    |
| Optics                    | PMMA opal diffuser flat with converter |
| Converter                 | DALI                                   |
| Dimmability               | direct                                 |
| Light emission area       | 220-240V 50/60Hz                       |
| Voltage                   |                                        |
| Length [mm]               | 751,8                                  |
| Width [mm]                | 35                                     |
| Height [mm]               | 35                                     |
| Diameter [mm]             | 750                                    |
| IP protection class       | IP20                                   |
| IP protection class       | protection cl. I                       |
| Material                  | die-cast aluminium                     |
| Colour of body            | white                                  |
| RAL                       | 9016                                   |
| Lifetime [h]              | L80 B10 50 000                         |
| Number of luminaires B16A | 25                                     |
| Net weight [kg]           | 6.65                                   |
| EAN number                | 9008905918865                          |

## LIGHT DISTRIBUTION CURVE

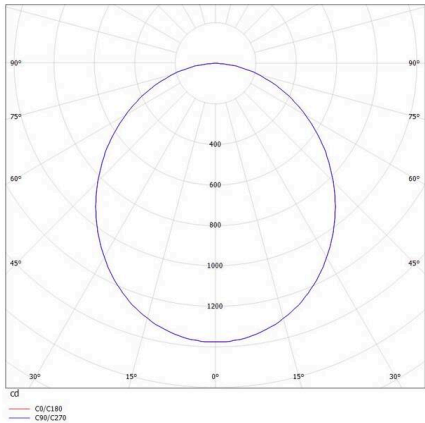

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.