


RINE

685-00100054305

RINE ROUND R RECESSED SPOTLIGHT made of aluminium, white matt, similar to RAL 9016, high-efficiently vacuum deposited aluminium reflector beam 36°, light output direct, swiveling 355°, tilting 30°, without converter, max. 350/500/700mA, dimmability: see converter, IP20




SKETCH

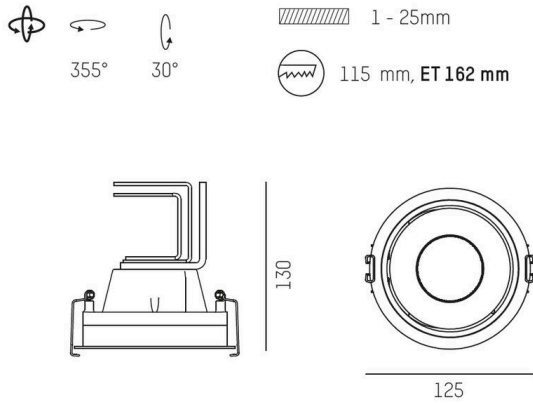

TECHNICAL DETAILS

Light source	LED 12/17/25W
Luminous flux [lm]	1230/1690/2240
Current sec. [mA]	350/500/700
Colour temperature	2700K
CRI	PREMIUM >90
Optics	vacuum deposited aluminium reflector
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	36°
Height [mm]	130
Diameter [mm]	125
Ceiling cutout [mm]	115
Ceiling thickness [mm]	1-25
Mounting depth [mm]	162
IP protection class	IP20
IP protection class	protection cl. II
Material	aluminium
Colour of body	white
RAL	9016
Lifetime [h]	L80 B10 50 000
Net weight [kg]	0.61
EAN number	9008905896712

LIGHT DISTRIBUTION CURVE

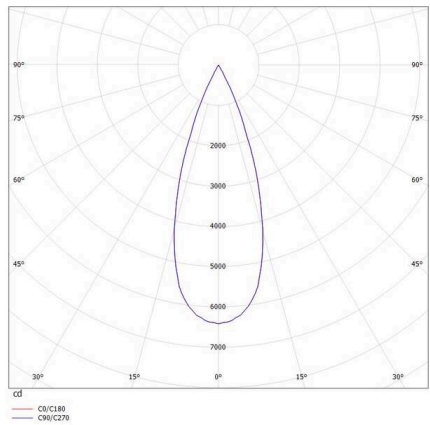

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.