


TURN ON 2

583-01141129061d000

TURN ON 2 SD WALL / CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, decor gold,opal diffuser light output direct, with converter, max. 1050mA, dimmability: not dimmable, IP20




SKETCH

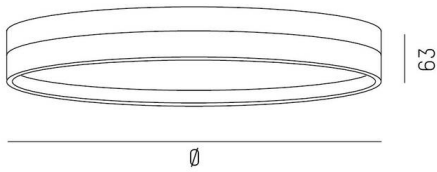

SYS 8W	Ø: 110mm
SYS 12W	Ø: 150mm
SYS 14W	Ø: 300mm
SYS 31W	Ø: 450mm

LIGHT DISTRIBUTION CURVE

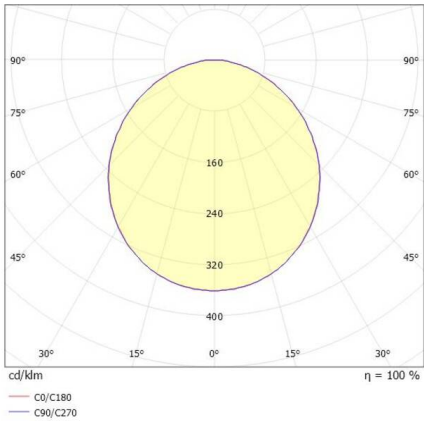

TECHNICAL DETAILS

System performance [W]	31
Luminous flux [lm]	2720
Current sec. [mA]	1050
Colour temperature	3000K
CRI	>90
Optics	opal diffuser
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Voltage	220-240V 50/60Hz
Height [mm]	63
Diameter [mm]	450
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK06
Material	aluminium
Colour of body	black
RAL	9005
Colour of decor	gold
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	50
Net weight [kg]	3.94
EAN number	9010506883350



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.