


RIDE RING

675-20101102906d


RIDE RING PD SUSPENSION made of die-cast aluminium, black, similar to RAL 9005, satined PMMA diffuser for homogeneous illumination light output direct, with converter, max. 500mA, dimmability: DALI, cable transparent, adapter/ceiling base black, pendant length 1500mm, IP20



Sketch

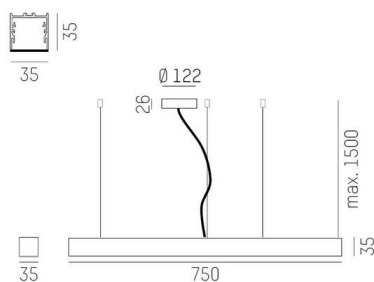

Light distribution curve

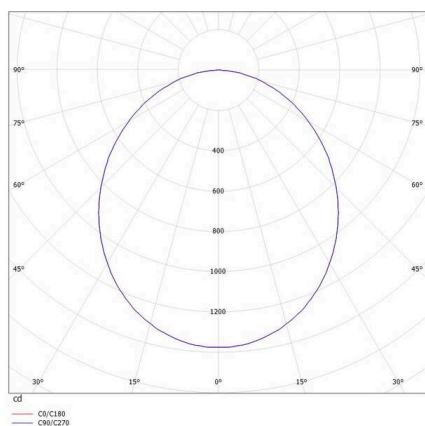

Technical details

Light source	LED
System performance [W]	38
Luminous flux [lm]	3590
Current sec. [mA]	500
Colour temperature	3000K
CRI	>90
Optics	PMMA opal diffuser flat with converter
Converter	DALI
Dimmability	direct
Light emission area	220-240V 50/60Hz
Voltage	

Length [mm]	780,4
Width [mm]	35
Height [mm]	35
Length pendant [mm]	1500
Diameter [mm]	750
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK03

Material	die-cast aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Cable	transparent
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	25

Net weight [kg]	7.04
EAN number	9008905919077



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.

Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.