


MOVA


695-11466168966001

MOVA M TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, black, similar to RAL 9005, decor black,high-efficiently vacuum deposited synthetic reflector beam asymmetric, accessoire: horizontal spread lens, light output direct, swiveling 350°, tilting 90°, max. 1050mA, dimmability: not dimmable, adapter/ceiling base black, IP20 vertical light projection,

SKETCH

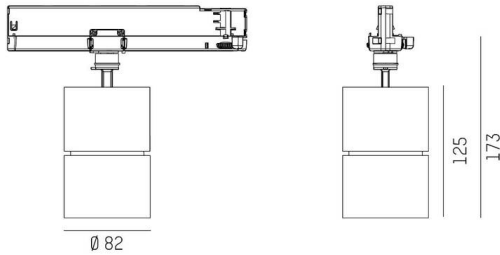

LIGHT DISTRIBUTION CURVE

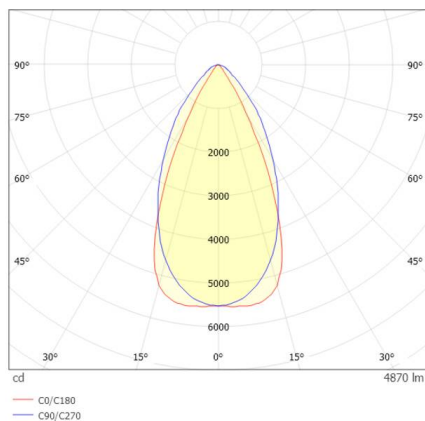

TECHNICAL DETAILS

Light source	LED
System performance [W]	40
Luminous flux [lm]	4870
Current sec. [mA]	1050
Colour temperature	3000K
CRI	HE>90
Optics	vacuum deposited synthetic reflector
Dimmability	not dimmable
Light emission area	direct
Beam angle [°]	asymmetric
Voltage	220-240V 50/60Hz
Length [mm]	228
Height [mm]	125
Diameter [mm]	82
IP protection class	IP20
IP protection class	protection cl. II
Material	aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Colour of decor	black
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	47
Net weight [kg]	0.56
EAN number	9010870839007



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.

Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.