



**MAGNETICS**

**708-016010023060**

MAGNETICS SPHERE S SD TRACK SPOTLIGHT WITH 24V ADAPTER made of hand-blown glass, black, similar to RAL 9005, satined glass satined, beam 330°, light output direct, UGR <16, without converter, max. 195mA, dimmability: not dimmable, adapter/ceiling base black, IP20

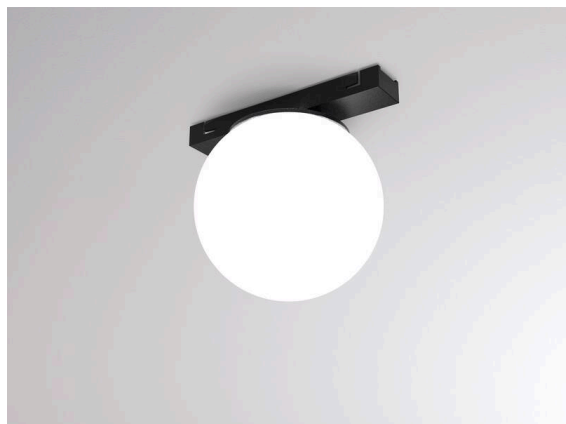


**SKETCH**

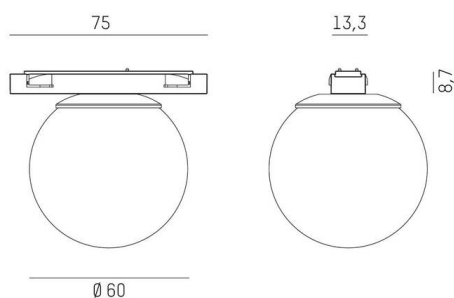

**TECHNICAL DETAILS**

Light source	LED
System performance [W]	5
Luminous flux [lm]	250
Current sec. [mA]	195
Colour temperature	2700K
CRI	>90
UGR	<16
Optics	satined glass
Converter	without converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	330°
Voltage	24 VDC
Length [mm]	75
Width [mm]	13,7
Height [mm]	67,1
Diameter [mm]	60
IP protection class	IP20
IP protection class	protection cl. III
IK value	IK00
Material	hand-blown glass
Colour of body	black
RAL	9005
Colour of glass/shade	satined
Colour of adapter / ceiling base	black
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Net weight [kg]	0.35
EAN number	9010870159891

**LIGHT DISTRIBUTION CURVE**

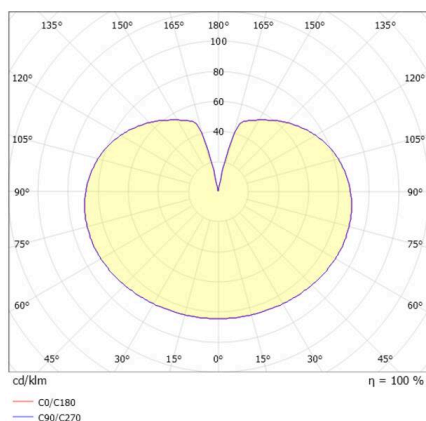

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.