



MAGNETICS

708-01601002306d

MAGNETICS SPHERE S SD TRACK SPOTLIGHT WITH 24V ADAPTER made of hand-blown glass, black, similar to RAL 9005, satined glass satined, beam 330°, light output direct, UGR <16, without converter, max. 195mA, dimmability: DALI, adapter/ceiling base black, IP20

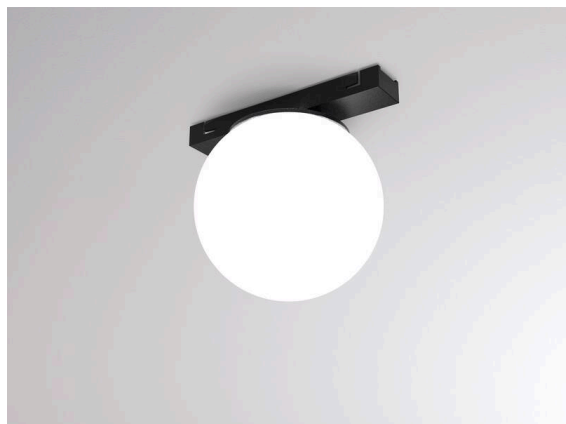


SKETCH

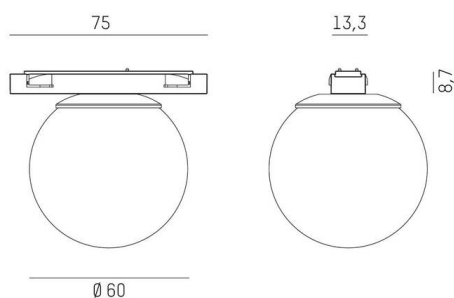

TECHNICAL DETAILS

| | |
|----------------------------------|--------------------|
| Light source | LED |
| System performance [W] | 5 |
| Luminous flux [lm] | 250 |
| Current sec. [mA] | 195 |
| Colour temperature | 2700K |
| CRI | >90 |
| UGR | <16 |
| Optics | satined glass |
| Converter | without converter |
| Dimmability | DALI |
| Light emission area | direct |
| Beam angle | 330° |
| Voltage | 24 VDC |
| Length [mm] | 75 |
| Width [mm] | 13,7 |
| Height [mm] | 67,1 |
| Diameter [mm] | 60 |
| IP protection class | IP20 |
| IP protection class | protection cl. III |
| IK value | IK00 |
| Material | hand-blown glass |
| Colour of body | black |
| RAL | 9005 |
| Colour of glass/shade | satined |
| Colour of adapter / ceiling base | black |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency class | E |
| Net weight [kg] | 0.40 |
| EAN number | 9010870398276 |

LIGHT DISTRIBUTION CURVE

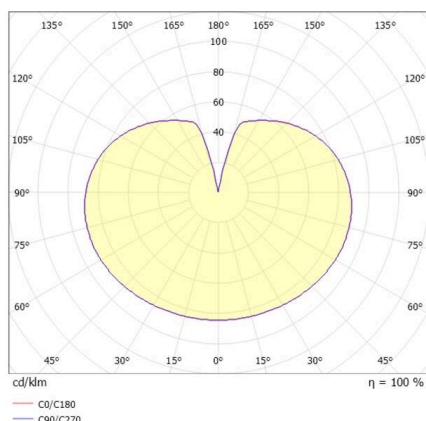

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.