


PILLE

737-200036hdv1

PILLE SINGLE M SD WALL / CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, shade made of hand-blown glass champagne, light output direct, with converter, max. 350mA, dimmability: DALI, IP20




SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	14
Luminous flux [lm]	940
Current sec. [mA]	350
Colour temperature	2700K
CRI	PREMIUM >90
Optics	hand-blown glass
Converter	with converter
Dimmability	DALI
Light emission area	direct
Voltage	220-240V 50/60Hz
Height [mm]	185
Diameter [mm]	188
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black
RAL	9005
Colour of glass/shade	champagne
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	50
Net weight [kg]	2.00
EAN number	9010870125643

LIGHT DISTRIBUTION CURVE

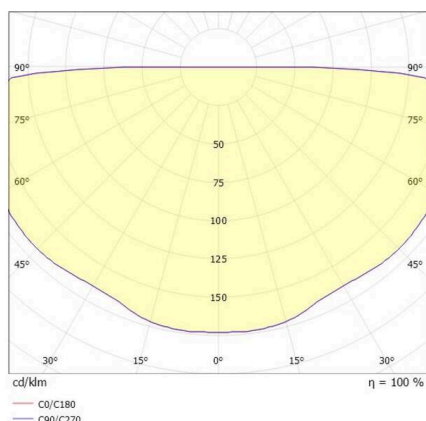

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.