



**BINA**

**698-310121994600**

BINA SDI ROUND SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, decor white, satined PMMA opal diffuser light output direct / indirect, with converter, max. 1050mA, dimmability: not dimmable, IP20

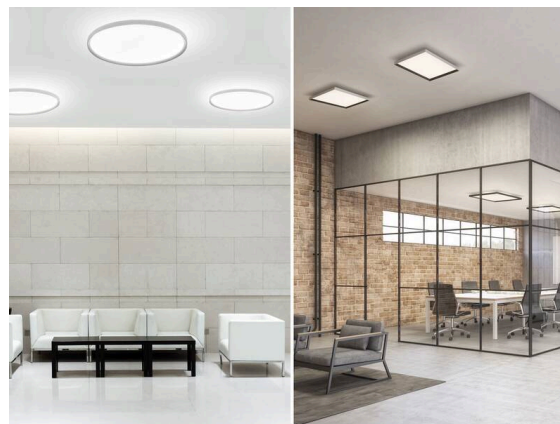


**SKETCH**

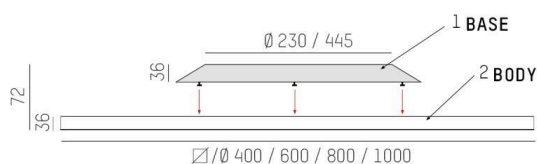

**TECHNICAL DETAILS**

Light source	LED
System performance [W]	45
Luminous flux [lm]	5380
Current sec. [mA]	1050
Colour temperature	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimmability	not dimmable
Light emission area	direct / indirect
Voltage	220-240V 50/60Hz
Height [mm]	72
Diameter [mm]	400
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black
RAL	9005
Colour of decor	white
Lifetime [h]	L80 B10 50 000
Number of luminaires B16A	24
Net weight [kg]	6.70
EAN number	9010506810554

**LIGHT DISTRIBUTION CURVE**

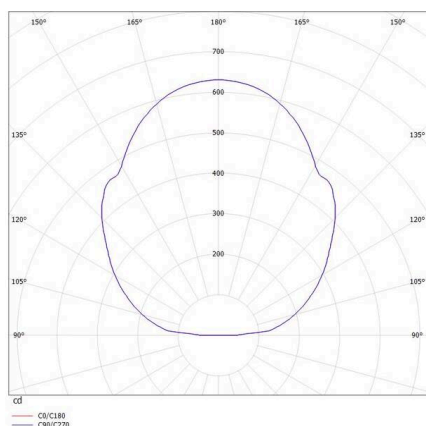

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.